
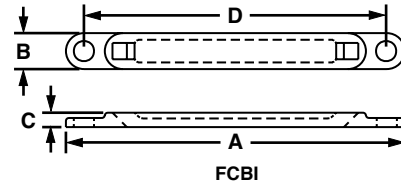


Flat Cable Mounting System – FCB Base and FCPI Plate

- Secures stacked cables, folds, and breakouts, as well as laminated and molded bus bars
- Use one base, one corresponding size plate (FCPI), and one Intermediate cross section cable tie
- For indoor use only
- See also Latching Flat Cable Mounts on page B2.35
- Material: Nylon 6.6





| Part Number | Max. Flat Cable Width | | Length A | | Width B | | Height C | | Hole Spacing D | | Color | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------|-----------------------|------|----------|-------|---------|-----|----------|-----|----------------|-------|-------|------------------------|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| FCBI1-A-C20 | 1.04 | 26.4 | 2.50 | 63.5 | 0.38 | 9.5 | 0.15 | 3.8 | — | — | Black | User Supplied Adhesive | 100 | 1000 |
| FCBI2-A-C20 | 2.04 | 51.8 | 3.50 | 88.9 | 0.38 | 9.5 | 0.15 | 3.8 | — | — | | User Supplied Adhesive | 100 | 1000 |
| FCBI3-A-C20 | 3.32 | 7.72 | 4.52 | 114.8 | 0.38 | 9.5 | 0.15 | 3.8 | — | — | | User Supplied Adhesive | 100 | 1000 |
| FCBI1-S10-C20 | 1.04 | 26.4 | 2.50 | 63.5 | 0.38 | 9.5 | 0.15 | 3.8 | 2.08 | 52.8 | | #10 (M5) Screw | 100 | 1000 |
| FCBI2-S10-C20 | 2.04 | 51.8 | 3.50 | 88.9 | 0.38 | 9.5 | 0.15 | 3.8 | 3.10 | 78.7 | | #10 (M5) Screw | 100 | 1000 |
| FCBI3-S10-C20 | 3.32 | 7.72 | 4.52 | 114.8 | 0.38 | 9.5 | 0.15 | 3.8 | 4.12 | 104.6 | | #10 (M5) Screw | 100 | 1000 |
| FCPI1-C20* | 1.04 | 26.4 | 1.29 | 32.8 | 0.38 | 9.5 | 0.20 | 5.1 | — | — | | Cable Ties | 100 | 1000 |
| FCPI2-C20* | 2.04 | 51.8 | 2.31 | 58.7 | 0.38 | 9.5 | 0.20 | 5.1 | — | — | | Cable Ties | 100 | 1000 |
| FCPI3-C20* | 3.32 | 7.72 | 3.32 | 84.3 | 0.38 | 9.5 | 0.20 | 5.1 | — | — | | Cable Ties | 100 | 1000 |

*Recommend for use with PLT2I cable ties on page B1.8

Closed Connector Rings

- Connect multiple cable bundles



| Part Number | Used with Cable Ties‡ | Length A | | Width B | | Height C | | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|-----------------------|----------|------|---------|-----|----------|-----|-----------------------------|---------|------------------|-----------------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | | | | | | |
| CR2-M | M, I, S | 0.33 | 8.4 | 0.20 | 5.1 | 0.20 | 5.0 | Nylon 6.6 | Natural | Indoors | Cable Ties | 1000 | 10000 |
| CR4H-M | M, I, S, HS, LH | 0.57 | 14.5 | 0.36 | 9.1 | 0.30 | 7.6 | | | Indoors | | | |
| CR4H-M0 | M, I, S, HS, LH | 0.57 | 14.5 | 0.36 | 9.1 | 0.30 | 7.6 | Weather Resistant Nylon 6.6 | Black | Indoors/Outdoors | | | |

‡Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard and LH = Light-Heavy.