


### Stackable Aerial Cable Spacer

- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Each spacer snaps into another to increase spacer heights by 1/2" increments
- Designed for use in parallel or perpendicular applications
- For use with Dura-Ty™ Cable Ties shown on page B1.51 or Pan-Steel® Self-Locking Ties on page B3.5 – B3.6.

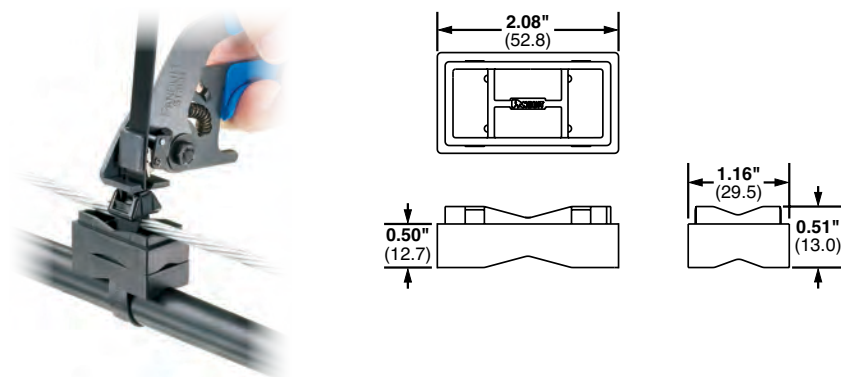


Part Number	Used with Cable Ties†	Material	Color	Environment	Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
SACS50-T100	LH, H, EH	Weather Resistant Polypropylene	Black	Outdoors	Cable Ties	200	2000

\*Cable tie cross sizes: LH = Light-Heavy, H = Heavy, and EH = Extra-Heavy.

### Aerial Support Ties – Weather Resistant Polypropylene

- Designed to attach coax or telephone cable to the 1/4" (6.4mm) or 5/16" (7.9mm) support strand to form the expansion loop and keep equipment and cables clear of pole hardware
- One-piece construction with integral 1/2" (12.7mm) spacer reduces inventory costs of separate spacer and bands, and installs faster to lower installed cost
- Releasable and re-usable
- Hand install only

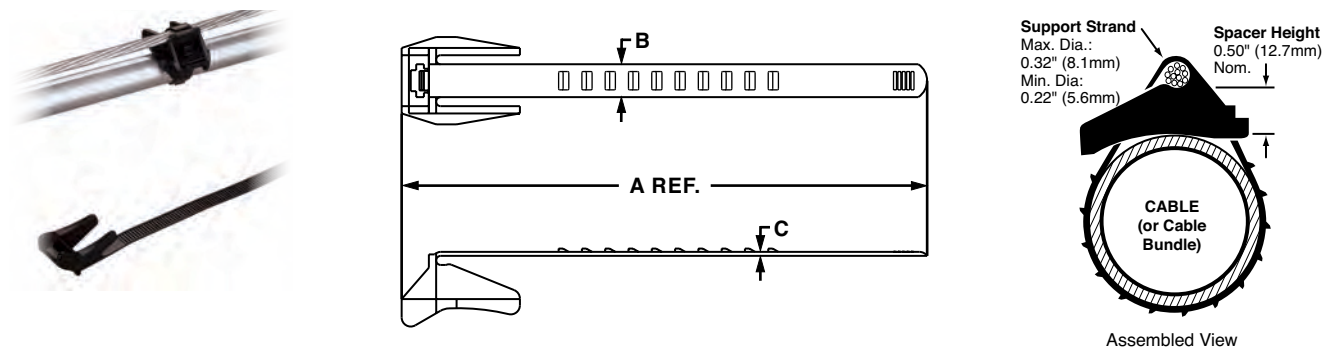

Part Number	Length A		Width B		Thickness C		Max. Bundle Diameter		Min. Loop Tensile Strength		Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm		
AST10-5-C100	5.6	142	0.448	11.4	0.55	1.4	1.00	25	75	334	100	1000
AST15-5-C100	6.9	175	0.448	11.4	0.55	1.4	1.50	38	75	334	100	1000
AST20-5-C100	8.4	214	0.448	11.4	0.55	1.4	2.00	51	75	334	100	1000
AST25-5-C100	10.0	254	0.448	11.4	0.55	1.4	2.50	64	75	334	100	1000