

Sentron[®] Bus Plugs



Selection / Application



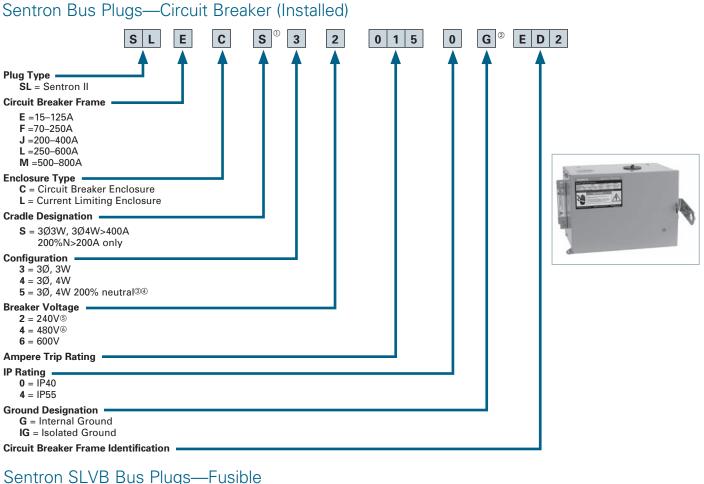

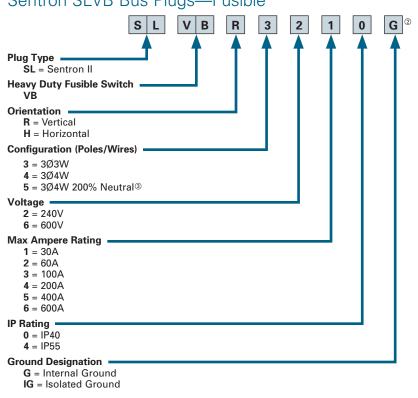

© The S digit is only used on 3- and 4-wire (100%N) plugs that are greater than 400A and 200%N plugs greater than 200A. Lower amperage plugs do not require this digit. (Ex. SLID3610, SLEC32060ED2)

- ⁽²⁾ The G and IG digits are used to specify internal and isolated ground respectively. Integral (housing) ground plugs do not require this digit. (Ex. SLID3610, SLEC360150ED6)
- ③ Available through 400A only.
- Available with E, F and J Frame breakers only.
 Available with ED2 breakers only.
- Available with ED4 and HHED6 breakers only.

5