


Operating Mechanisms

Selection

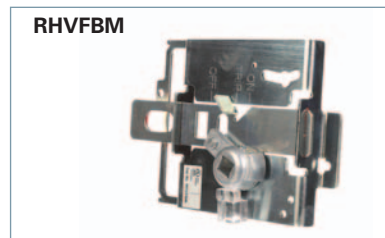

| Description | For DG to FG Frame 150 to 250 A | For JG to LG Frame 400 A to 600 A |
|--|---|--|
| | Catalog Number | Catalog Number |
| Through-Door Rotary Handle Operator Kit Fixed depth and the handle is mounted directly on the circuit breaker. Lockable knob (for up to 3 padlocks). NEMA 1, 12 Red Handle Version with red knob, yellow indicator plate NEMA 1, 12 | RHFF RHFFEM | RHFL RHFLEM |
| Door-Mounted Rotary Handle Operator Kit Variable depth, door mounted handle. Includes knob with masking frame, indicator plate, detachable door coupling, 12" shaft, and breaker mounted rotary operator. Lockable knob (for up to 3 padlocks). NEMA 1, 12 | RHVF12 | RHVL12 |
| Auxiliary Switch Kits For Direct or Extended Rotary Handle Operators (RHF and RHV). Form C, Early Break type2 Aux. Switch Kit [Ⓞ] Includes 1 switch with 5' wire For Door-Mounted Operator For Through-Door Operator Includes 2 switches with 5' wire For Door-Mounted Operator For Through-Door Operator | — RHSFA1F — RHSFA2F | — RHSLA1 RHSLA1F — RHSLA2 RHSLA2F |
| Door-Mounted Rotary Operator Mechanism Breaker mechanism only | RHVFBM | RHVLBM |
| Door-Mounted Rotary Handle Only Standard version NEMA 1, 12 NEMA 3R NEMA 4X Red Handle version | RHVM12H RHVM3RH RHVM4XH RHVMEMH | RHVM12H RHVM3RH RHVM4XH RHVMEMH |
| NFPA-79 Handle Kit Intermediate handle for NFPA-79 compliance with door-mounted rotary operator | RHVF79H | RHVM79H |
| Extension Shaft Only, for Door Mounted Operator 2 inches (50.8mm) 3 inches (76.2mm) 12 inches (304.8 mm) 16 inches (406.4 mm) 24 inches (609.6mm) w/ support bracket | RHVMS02 — RHVMS12 RHVMS16 RHVMS24 | RHVMS02 — RHVMS12 RHVMS16 RHVMS24 |

Ⓞ During manual operation, Early Break auxiliary switch contacts open before the breaker opens.