

## Accessories

### Side Hanger Clamp




The side hanger clamp is used to construct trapeze supports using threaded rods. The offset support hole allows for trouble-free access to support nuts for height adjustment and the rod can continue downward to allow for multi-level (tiered) trapeze installations. A set screw holds tray firmly in position once installation is complete. Available in pregalvanized steel. For use with 3/8 in. threaded rod.

**EXPRESS TIP**

Refer to page C47 for an application example.

### Dimensions

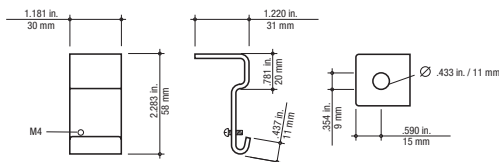

Cat. No.	Material	Weight	
		lb./ea.	kg/ea.
ETH-SH-PG	Pregalvanized Steel	0.13	0.06
ETH-SH-HD	Hot-dipped Galvanized Steel		
ETH-SH-S6	Stainless Steel (Type 316)	0.13	0.06

### Universal Clamp




The universal clamp is used to secure large cable drop-outs to the end of a cable run as well as attaching bottom inserts to lengths of ExpressTray®.

**EXPRESS TIP**

Refer to pages C43 and C44 for application examples.

Note: To hold down 2 in. x 2 in. wire basket tray, use 1 ETH-UNIVC-XX with bottom half of ETH-SP-XX. See page C14.

### Dimensions



Cat. No.	Material	Weight	
		lb./ea.	kg/ea.
ETH-UNIVC-PG	Pregalvanized Steel	0.09	0.04
ETH-UNIVC-HD	Hot-dipped Galvanized Steel		
ETH-UNIVC-S6	Stainless Steel (Type 316)		

### Wall Clamp




This wall clamp attaches the flange of U- and C-profile ExpressTray®, up to a maximum of 8 in. wide, to the wall surface. Available in pregalvanized steel and stainless steel.

**EXPRESS TIP**

Refer to page C50 for an application example.

### Dimensions



Cat. No.	Material	Weight	
		lb./ea.	kg/ea.
ETH-WC-PG	Pregalvanized Steel	0.18	0.08
ETH-WC-SS	Stainless Steel (Type 304)		