


The Marrette<sup>®</sup> Luminaire Disconnect protects electricians servicing fluorescent lights over 150V from electrical shock!

### Suited for

- Fluorescent lighting fixture and ballast (OEMs)
- Electricians servicing fluorescent light fixtures
- Maintenance personnel requiring an electrical disconnect

### Specifications

Housing:	Polycarbonate
Contacts:	Tin-plated brass
Integral leads:	Insulated 18 AWG solid copper
Max. temp. rating:	105°C
Flammability:	UL94-V2 (V0 available on request)
Electrical rating:	4A, 600V
Standards:	CSA Certified, UL listed, NEC 410.73(G) 2005 edition compliant

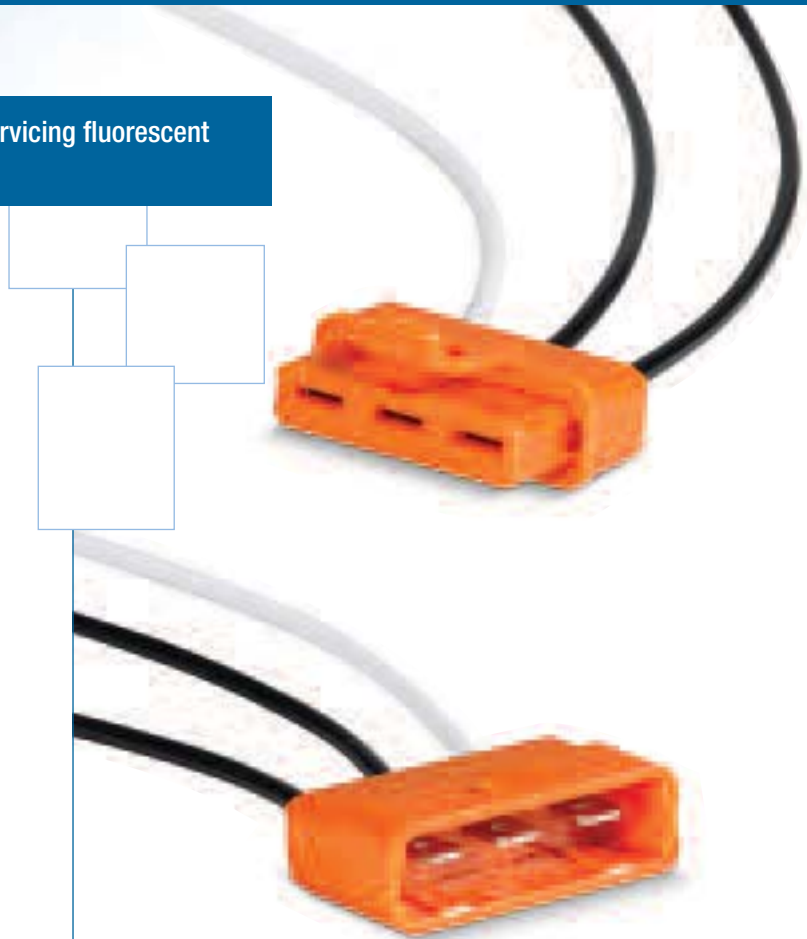

**Ordering Information**

Model	Description
LD2C-D	2-pole luminaire disconnect (marrettes not included)
LD3C-D	3-pole luminaire disconnect (marrettes not included)
LD2-C	2-pole luminaire disconnect (2 x 4 marrettes 333 /inner bag)
LD3-C	3-pole luminaire disconnect (6 of each marrettes (331 + 333) /inner bag)

**Packaging Options**

	Catalogue Number	Packaging Format	Std. Pkg. (Min./Mult.)
<b>BULK</b>	LD2C-D LD3C-D	Box Box	Sold <b>without</b> marrettes. Inner: 50 per inner bag Outer: 250 per outer box Master: 500 in master box <b>Sold in multiple of 500</b>
	LD2-C LD3-C	Bag Bag	Sold <b>with</b> marrettes. Inner: 2 per inner bag Outer: 20 per outer bag Master: 200 in master box <b>Sold in multiple of 20</b>