


## Metric Connectors for Copper Conductor

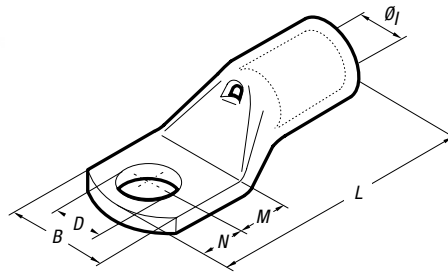

CAT. NO.	COND. SIZE SQMM		Ø STUD MM	DIMENSIONS (MM)						STD. PKG.	6 TON TBM62BSCR (CRIMPS)	14 TON BPLT14BSCRI (CRIMPS)	26 TON TBM26MCC (CRIMPS)	60 TON TBM60MCC (CRIMPS)
	LOW STRANDED	I FLEXIBLE		ØI	B	M	N	L	D					
MCC120M6			8	—	—	—	—	—	6.4	25				
MCC120M8*			8	15,2	28,5	9,0	8,0	54,0	8.4	25				
MCC120M10*	120	95 120	10	15,2	28,5	11,0	10,0	58,0	10.5	25	MCD120-6 (2)	MCD120-14 (1)	N/A	N/A
MCC120M12*			12	15,2	28,5	14,0	12,0	63,0	13.2	25				
MCC120M16*			16	15,2	28,5	18,0	16,0	71,0	17.0	25				
MCC150M12*			12	16,7	31,5	16,0	14,0	75,0	13.2	25	MCD150-6	MCD150-14	N/A	N/A
MCC150M16*	150	150	16	16,7	31,5	19,0	17,0	81,0	17.0	25	(3)	(1)	N/A	N/A
MCC185M10*			10	19,2	35,5	13,0	11,0	76,0	10.5	25				
MCC185M12*	185	150 185	12	19,2	35,5	16,0	14,0	82,0	13.2	25	MCD185-6 (3)	MCD185-14 (1)	N/A	N/A
MCC185M16*			16	19,2	35,5	19,0	17,0	88,0	17.0	15				
MCC240M10*			10	21,1	39,0	13,0	11,0	82,0	10.5	15				
MCC240M12*	240	185 240	12	21,1	39,0	16,0	14,0	88,0	13.2	15	MCD240-6 (3)	MCD240-14 (2)	N/A	N/A
MCC240M16*			16	21,1	39,0	19,0	17,0	94,0	17.0	15				
MCC300M10*			10	23,7	44,0	20,0	11,0	96,0	10.5	10				
MCC300M12*	300	240	12	23,7	44,0	20,0	14,0	99,0	13.2	10	N/A	MCD300-14 (3)	N/A	N/A
MCC300M16*			16	23,7	44,0	22,0	19,0	10,0	17.0	10				
MCC400M10			12	27,0	51,0	22,0	19,0	113,0	13.2	5				
MCC400M12	400	300	12	27,0	51,0	22,0	19,0	113,0	13.2	5	N/A	MCD400-14 (3)	MCD400-26 (2)	MCD400-60 (2)
MCC400M16			16	27,0	51,0	22,0	19,0	113,0	17.0	5				
MCC500M10			16						13.2	5				
MCC500M12	500	400	16						17,0	5	N/A	N/A	MCD500-26 (2)	MCD500-60 (2)
MCC500M16			16	30,3	56,5	22,0	19,0	117,0	17,0	5				
MCC630M16	630	500	16	33,4	61,6	22,0	19,0	128,0	17,0	6	N/A	N/A	MCD630-26 (2)	MCD630-60 (2)
MCC630M20			20	33,4	61,6	24,0	23,0	134,0	21,0	6				
MCC800M16	800	630	16	38,0	72,0	24,0	19,0	141,0	17,0	3	N/A	N/A	N/A	MCD800-60 (2)
MCC800M20			20	38,0	72,0	24,0	23,0	145,0	21,0	3				
MCC1000M16	1000	800	16	44,0	80,0	24,0	19,0	158,0	17,0	2	N/A	N/A	N/A	MCD1000-60 (2)
MCC1000M20			20	44,0	80,0	24,0	23,0	162,0	21,0	2				

\*UL® Listed

Note: See metric compression tools on p. F-100.

Connectors & Grounding — Blackburn® Compression Connectors Featuring the Color-Keyed® System