


Aluminum Splices

CSA Non-Tension Splices

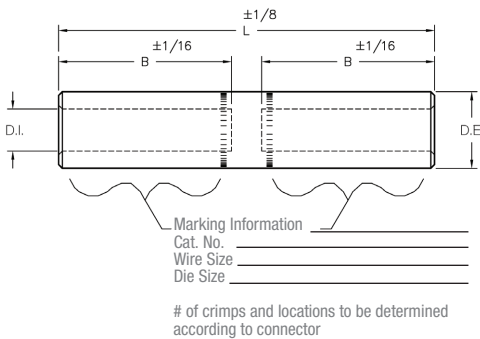

Compress these lugs with standard tools and dies

- Provides high strength and high-conductivity
- Assures proper cable insertion
- Use with aluminum and copper conductors
- Prevents oxidation and keeps out moisture
- Easy identification
- Meet or exceed ANSI C119.4 specifications

| Cat. No. | Wire Size | CSA Die | O.D. | I.D. | Dimensions | |
|------------|--------------------|---------|-------|-------|------------|------|
| | | | | | L | B |
| GLE 2 | 2 str.-Compr-CPT | 22 | 0.635 | 0.340 | 2.00 | 0.96 |
| GLE 1/0 | 1/0 str.-Compr-CPT | | | 0.420 | | |
| GLE 2/0 | 2/0 str.-Compr-CPT | 24 | 0.840 | 0.503 | 2.13 | 1.31 |
| GLE 3/0 | 3/0 str.-Compr-CPT | | | 0.547 | | |
| GLE 4/0 | 4/0 str.-Compr-CPT | 24-6T | 1.000 | 0.594 | 2.75 | 1.44 |
| GLE 250 | 250 str.-Compr-CPT | 26 | | 0.620 | | |
| GLE 300 | 300 str.-Compr-CPT | 26-12T | 1.189 | 0.670 | 3.13 | 1.88 |
| GLE 350 | 350 str.-Compr-CPT | 28 | | 0.730 | | |
| GLE 500 | 500 str.-Compr-CPT | 28-12T | 1.438 | 0.835 | 4.00 | 2.13 |
| GLE 500-30 | 500 str.-Compr-CPT | 30-12T | | 0.880 | | |
| GLE 750 | 750 str.-Compr-CPT | 30 | | 1.031 | 4.50 | |

Finish: Tin-plated optional, use suffix "TN".

Material: E.C. Grade Aluminum.

Connector bores are coated with HM 53 a oxide inhibiting compound and capped.