


Fittings and Brackets

Post Bases

AP232

AP232HDGC
AP232EG
AP232


Wt./C 384 lb.



AP235

AP235HDGC
AP235EG
AP235


Wt./C 400 lb.



AP232SQ

AP232SQHDGC
AP232SQEG
AP232SQSS6


Wt./C 384 lb.



AP235SQ

AP235SQHDGC
AP235SQEG
AP235SQ
AP235SQSS6


Wt./C 400 lb.



AP232FL

AP232FLHDG
AP232FLEG
AP232FL


Wt./C 272 lb.



AP235FL

AP235FLHDGC
AP235FLEG
AP235FL


Wt./C 360 lb.



AN270

*Finishes


- HDG
- EG



Cat. No.	A	B	Wt./C lb.
AN270-1*	2-3/8	6	113
AN270-2*	4-3/8	8	151
AN270-3*	6-3/8	10	199
AN270-4*	8-3/8	12	246
AN270-5*	10-3/8	14	293

TS272 Track Support


TS272HDG



Requires 3/8 in. x 2-1/2 in. bolt and nut (not included)
Design load: 1000 lb.
Wt./C 104 lb.

TS273 Track Support

TS273HDG

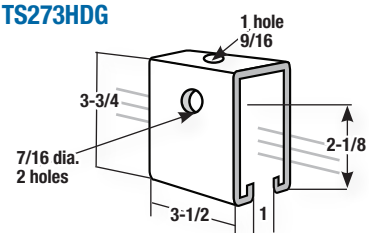

For use over channel splice
Requires 3/8 in. x 2-1/2 in. bolt and nut (not included)
Design load: 2000 lb.
Wt./C 228 lb.