

Metallic – aluminum Fittings – explaining the fitting styles


A

H-style

H-style fittings constructed with side rail having inner and outer flanges (H-beam).

Features and benefits

- Improved system rigidity
- Improved aesthetics and customer appeal
- Easy to install
- Easy-to-align straights and fittings
- Splice plate holds components together while hardware is inserted
- Premium design
- 3" tangents on fittings
- 7" length snap-in splice plate

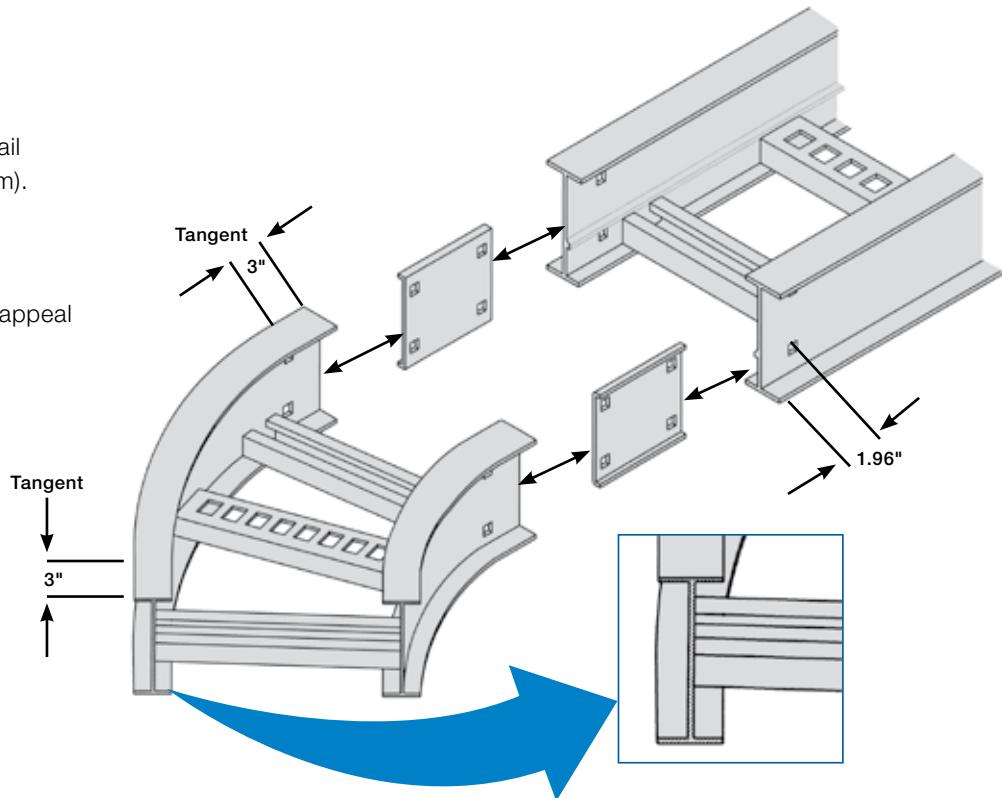


U-style

U-style fittings constructed with side rail flanges on the inside only (U-beam).

Features and benefits

- U-style and H-style are interchangeable
- Lowest purchase price
- Easy to install
- Occupies less space in areas where space is restrained
- Easy-to-align straights
- Splice plate holds components together while hardware is inserted
- Lighter fittings are easy to handle
- Functional design
- 7" length snap-in splice plate

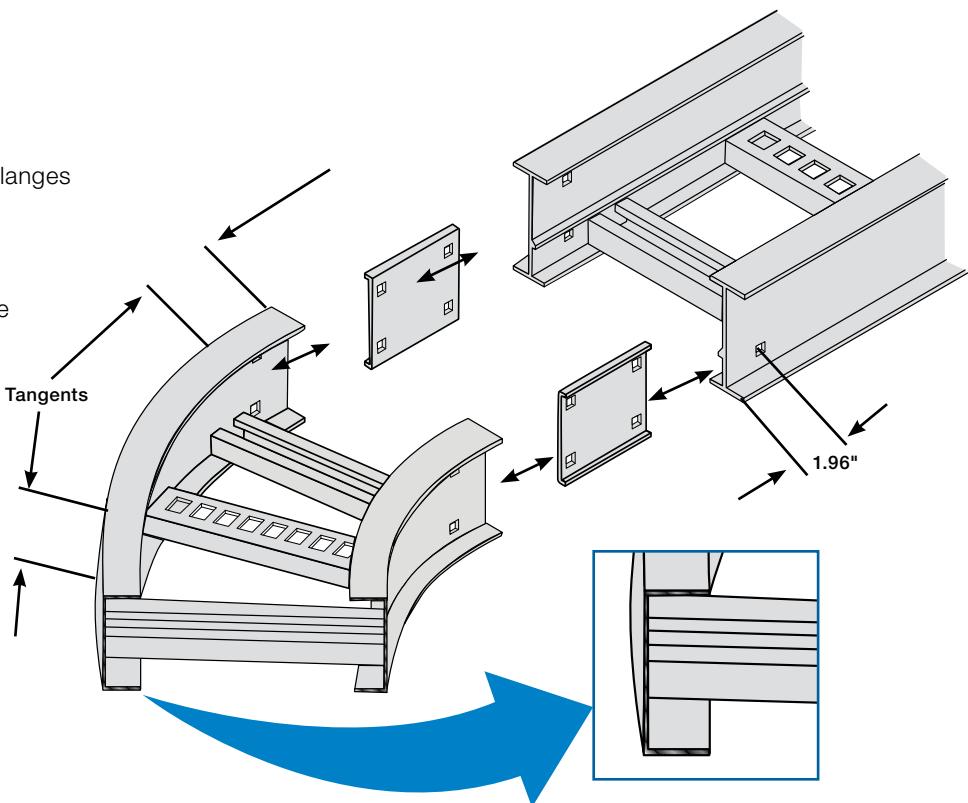

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Metallic – aluminum
Fittings – horizontal fittings selection

A

Fittings in a cable tray system are required to change cable routing direction and to join straight sections and other fittings. This step of the cable tray selection process requires that the specifier chooses between two distinct styles, U and H.

Note: The U-style and H-style systems are interchangeable.


H-style fitting

- An H-shaped extrusion forms the fitting side rail.
 - H-style fittings utilize a 7" splice plate and the fittings have 3" tangents at the extremities.
 - This style offers enhanced aesthetics to the end user and increased system rigidity.

U-style fitting

- A U-shaped extrusion forms the fitting side rail.
 - U-style fittings utilize a 7" splice plate and the fittings have tangents at the extremities.
 - This style offers maximum quality versus cost ratios of the installation.

Fitting number selection

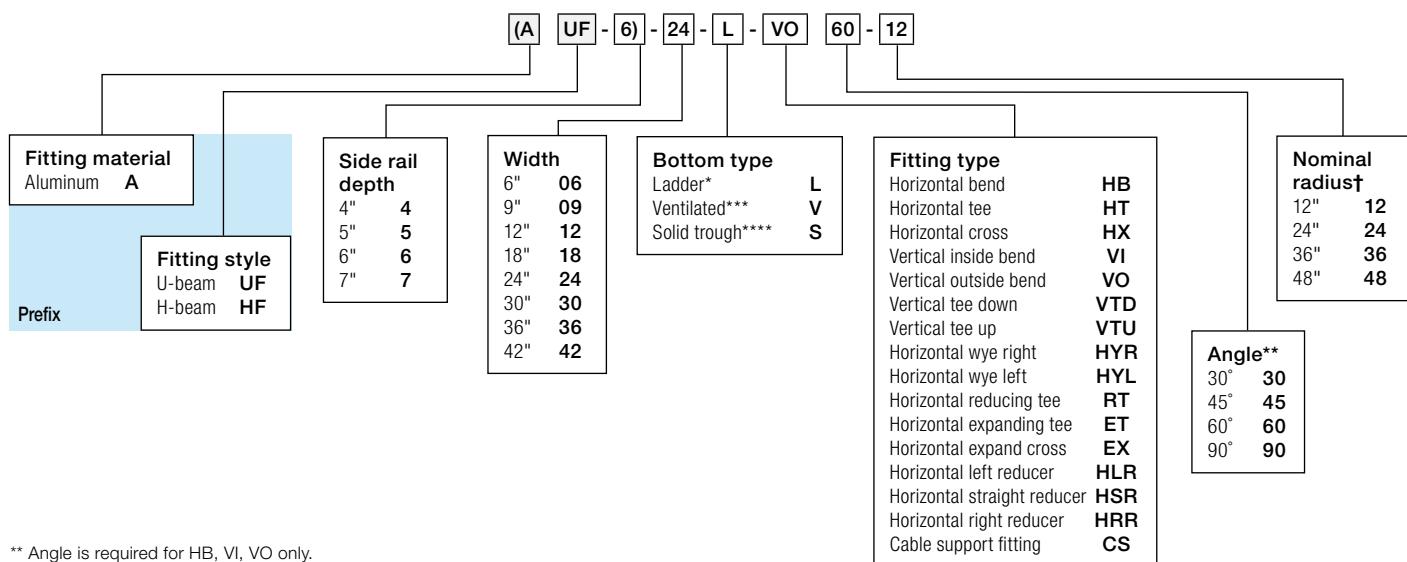

** Angle is required for HB, VI, VO only.

† Radius is not required for the following fitting types: HYR, HYL, HLR, HRR, HSR

* Manufactured with 9" rung spacing measured at the center line of fitting.

*** Manufactured with 4" edge to edge rung spacing measured at the center line of fitting.

**** Manufactured with flat sheet inserted under rungs with 9" rung spacing measured at the center line of fitting.

NOTE: The following special options are available. To order, add the indicated suffix to the very end of the catalog number.

AS PER THE FOLLOWING SPECIAL OPTIONS ARE AVAILABLE. TO ORDER, ADD THE INDICATED SUFFIX TO THE VERY END OF THE CATALOG NUMBER.

F = Flange cut
G = Ground hole

H = Stainless steel type 316 hardware nuts and washers.

MB = Marine rung alternated

LIM = Marine lung holes up

UM = Marine rung holes up
BII = Rung with square hole


RU = Rung with square holes on top
FR = Flat rung

FR = Flat rung

Metallic – aluminum

Fittings – U-style fittings horizontal tees

Catalog number system

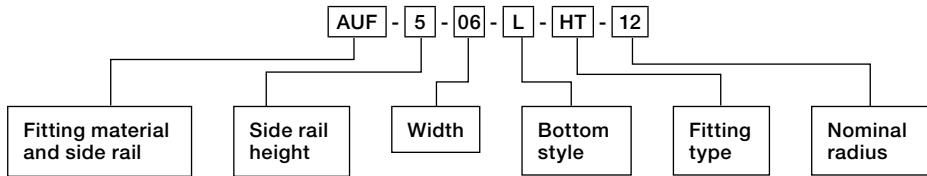


Selection guide

Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42"


Nominal radius: 12, 24, 36, 48"

Bottom styles: L – ladder, V – ventilated, S – solid

Side rail heights: 4" – 7"



Horizontal tee – U-style



Nominal Radius (in.)	Width (in.)	Cat. No.	Dimensions (in.)	
			X	Y
12	6	AUF(t)-06-(*)-HT12	15	30
	9	AUF(t)-09-(*)-HT12	16½	33
	12	AUF(t)-12-(*)-HT12	18	36
	18	AUF(t)-18-(*)-HT12	21	42
	24	AUF(t)-24-(*)-HT12	24	48
	30	AUF(t)-30-(*)-HT12	27	54
	36	AUF(t)-36-(*)-HT12	30	60
	42	AUF(t)-42-(*)-HT12	33	66
	6	AUF(t)-06-(*)-HT24	27	54
	9	AUF(t)-09-(*)-HT24	28½	57
	12	AUF(t)-12-(*)-HT24	30	60
	18	AUF(t)-18-(*)-HT24	33	66
24	24	AUF(t)-24-(*)-HT24	36	72
	30	AUF(t)-30-(*)-HT24	39	78
	36	AUF(t)-36-(*)-HT24	42	84
	42	AUF(t)-42-(*)-HT24	45	90
	6	AUF(t)-06-(*)-HT36	39	78
	9	AUF(t)-09-(*)-HT36	40½	81
	12	AUF(t)-12-(*)-HT36	42	84
	18	AUF(t)-18-(*)-HT36	45	90
	24	AUF(t)-24-(*)-HT36	48	96
	30	AUF(t)-30-(*)-HT36	51	102
	36	AUF(t)-36-(*)-HT36	54	108
	42	AUF(t)-42-(*)-HT36	57	114
36	6	AUF(t)-06-(*)-HT48	51	102
	9	AUF(t)-09-(*)-HT48	52½	105
	12	AUF(t)-12-(*)-HT48	54	108
	18	AUF(t)-18-(*)-HT48	57	114
	24	AUF(t)-24-(*)-HT48	60	120
	30	AUF(t)-30-(*)-HT48	63	126
	36	AUF(t)-36-(*)-HT48	66	132
	42	AUF(t)-42-(*)-HT48	69	138

(†) Insert side rail height. (*) Insert bottom style to complete Cat. No. Tees include two pairs/crosses include three pairs of splice plates with hardware. T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.