


## Power / Communication

### Accessories

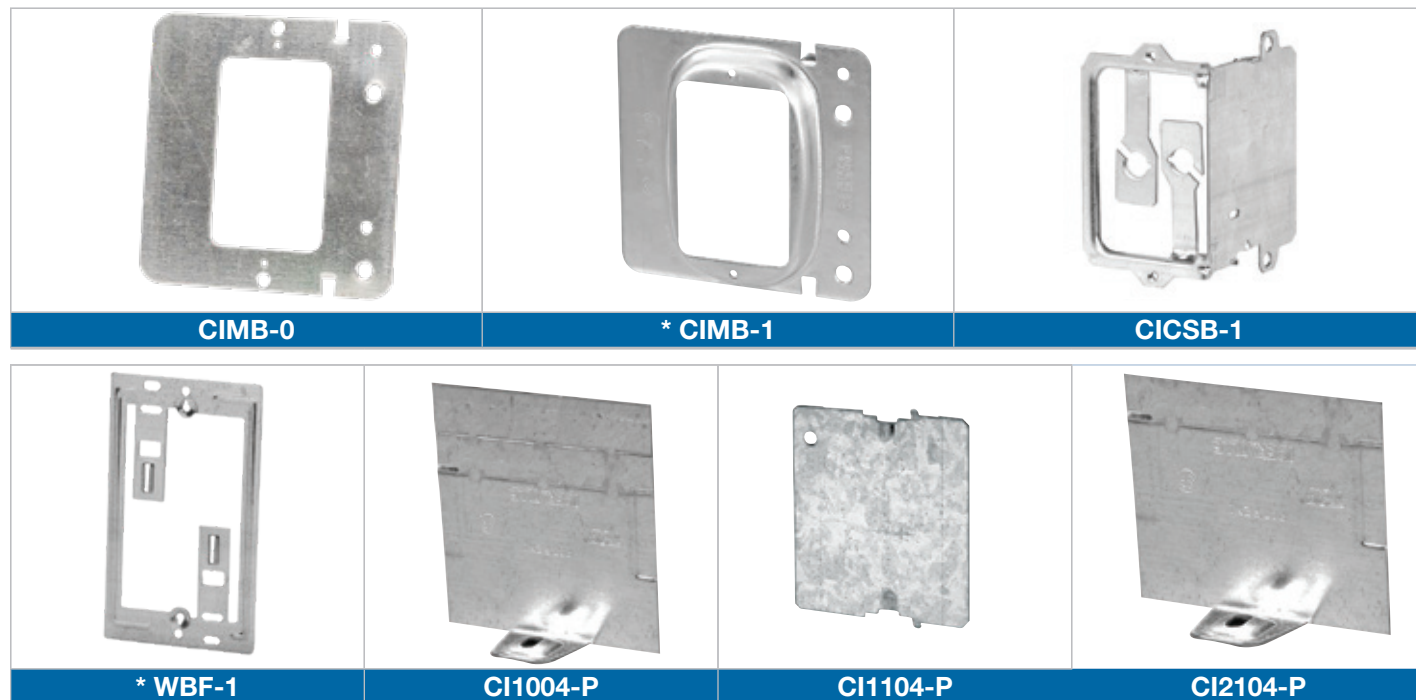

Cat. No.	Description
<b>Low Voltage Mounting Brackets</b>	
<b>CIMB-0</b>	Flat mounting brackets that provides quick installation of low voltage class 2 communication outlets Positioning tabs ensure straight installation
<b>CIMB-1*</b>	Mounting brackets that provides quick installation of low voltage class 2 communication outlets Raised 1/2 in. Positioning tabs ensure straight installation
<b>CICSB-1</b>	Mounting brackets that provides quick installation of low voltage communication outlets May be used with all 2-1/2 in. deep gangable boxes
<b>WBF-1*</b>	Low voltage wall bracket
<b>Device Box Partitions</b>	
<b>CI1004-P</b>	Steel partitions for 2 in., 2-1/2 in. and 3 in. deep outlet boxes
<b>CI1104-P†</b>	Steel partitions for 2-1/2 in. deep gangable boxes. May be used with all 1104 and 3104 series of boxes.
<b>CI2104-P</b>	Steel partitions for 2 in. and 2-1/2 in. deep outlet boxes

**\*Note: Install partition while ganging boxes**

In accordance with C.E.C. 2012 Edition, Rule 12-3030: Conductors that are connected to different power or distribution transformers or other different sources of voltage shall not be installed in the same box, cabinet, or fitting unless a barrier of sheet steel not less than 1.3 mm thick or a flame-retardant nonmetallic insulating material not less than 1.6 mm in thickness is used to divide the space into separate compartments for the conductors of each system.


See page A67 for additional class 2 brackets

\* Not applicable

## Low Voltage Brackets

### Steel

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work
- Installs easily with a drywall saw and screwdriver

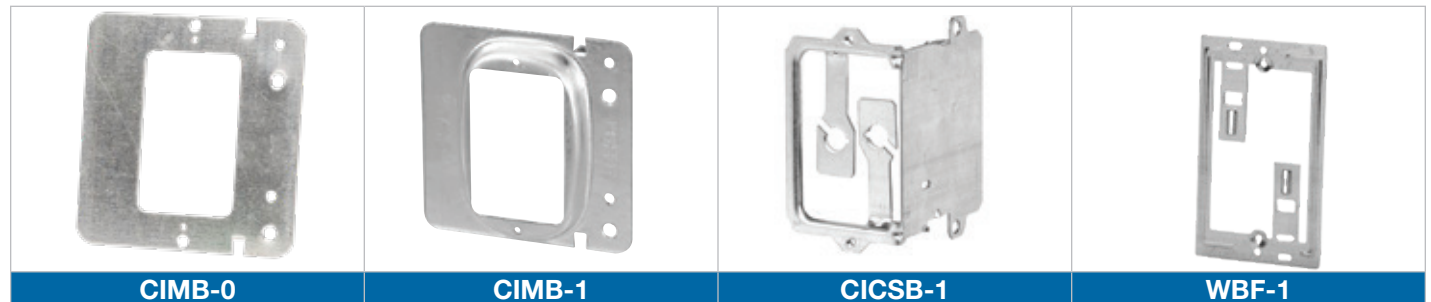

Cat. No.	Description
<b>Low Voltage Mounting Brackets</b>	
<b>CIMB-0</b>	Flat mounting brackets that provides quick installation of low voltage class 2 communication outlets Positioning tabs ensure straight installation
<b>CIMB-1</b>	Mounting bracket that provides quick installation of low voltage class 2 communication outlets. Raised 1/2 in. Positioning tabs ensure straight installation
<b>CICSB-1</b>	Mounting brackets that provides quick installation of low voltage communication outlets May be used with all 2-1/2 in. deep gangable boxes
<b>WBF-1</b>	Low voltage wall bracket



Cat. No.	Dimensions (in.)		Hole Size (in.)	Suggested Application
	H	W		
<b>Nailing Straps (Zinc Plated Steel)</b>				
<b>CI1544</b>	0.25	0.51	-	14/2-12/2
<b>Nailing Straps (Polyethylene)</b>				
<b>CI1544-P</b>	0.25	0.49	-	14/2-12/2
<b>CI1546-P</b>	0.25	0.75	-	14/2-8/2
<b>Cable Staples (Galvanized Steel)</b>				
<b>CIS-1</b>	0.25	0.48	-	14/2-12/2
<b>CIS-2</b>	0.44	0.54	-	2 cables 14/2; 2 cables 12/2 14/2-14/3-12/2-12/3-10/2-10/3
<b>CIS-3</b>	0.49	0.70	-	10/2-8/2; 14/3-10/3
<b>CIS-4</b>	0.76	0.86	-	8/3-6/3
<b>Double Cable Staples (Galvanized Steel)</b>				
<b>CIS-1X2</b>	0.25	0.48 x 2	-	14/2-12/2
<b>CIS-1X2-FP3</b>				
<b>CIS-1X2-FP5</b>				

