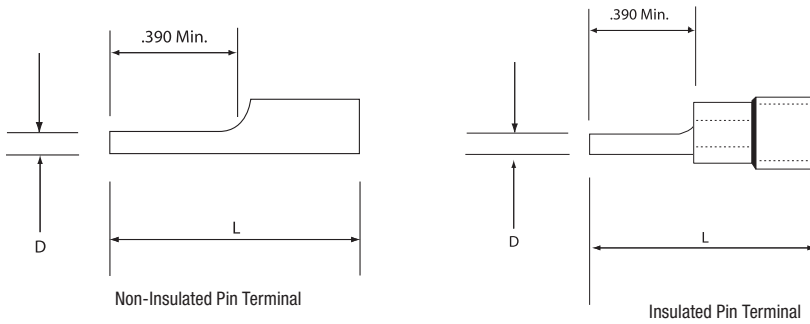## Pin Terminals

- Provide an easy and effective way to terminate stranded wire into European/metric style terminal blocks
- Designed to prevent shorting, wire strand loss and/or wire pullout resulting from improper termination of stranded wire
- Designed to meet emerging global standards which require wire-to-metric style terminal block installations be terminated with a "pin" style terminal
- Available in vinyl insulated, nylon insulated, and non-insulated styles
- All styles offered in 22 AWG to 10 AWG and compatible with existing Sta-Kon® tooling

.390 Min.

D

L

Non-Insulated Pin Terminal

.390 Min.

D

L

Insulated Pin Terminal

Cat. No.	Pkg. Qty.	Wire Range	D (Dia.) (in.)	L	Rec. Tool	Stock Thick. (in.)
Non-Insulated						
A47PT	1,000	22–18	0.075	0.63	ERG4002	0.02 0.03 0.04
B47PT	1,000	16–14	0.075	0.63		
C55PT	500	12–10	0.106	0.76		
Vinyl						
18RA-47PT	100	22–18	0.075	0.85	ERG4001	0.02
RA47PT	1,000	22–18	0.075	0.85		
14RB-47PT	100	16–14	0.075	0.87		0.03
RB47PT	1,000	16–14	0.075	0.87		
10RC-55PT	50	12–10	0.106	1.04		0.04
RC55PT	500	12–10	0.106	1.04		
Nylon						
RA18-47PT	100	22–18	0.075	0.85	ERG4001	0.02
RA147PT	1,000	22–18	0.075	0.85		
RB14-47PT	100	16–14	0.075	0.87		0.03
RB147PT	1,000	16–14	0.075	0.87		
RC10-55PT	50	12–10	0.106	1.04		0.04
RC155PT	500	12–10	0.106	1.04		