


Splice Insulators and Insulating Covers

Adhesive Insulating Covers

- Seals against moisture
- Voltage rating up to 600 V
- Workable from -10°C to 49°C (14°F to 120°F)
- Maximum operating temperature of 80°C (176°F)
- No installing tools required
- Also available in 10' rolls; consult your Regional Sales Office

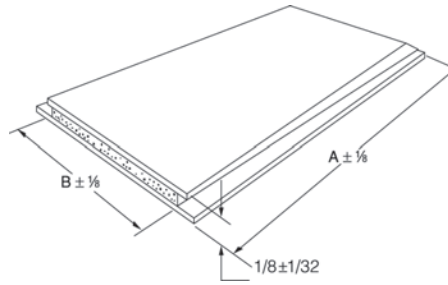

Electrical

- Dielectric Constant: 3.2 ASTM-D150 (60 Hz)
- Power Factor: 0.07 ASTM-D150 (60 Hz)
- Dielectric Strength: 340 V/mil ASTM-D1373

Chemical

- Water Absorption: 0.06% ASTM-570
- Ozone Resistance: Excellent: 0.03% ASTM-D1373
- Corrosion None Visible: per ASTM-D 69



Cat. No.	A (in.)	B (in.)	Std. Pkg. Qty.
AC 5 x 3	5	3	10
AC 5 x 7		7	
AC 85 x 75	8.5	7.5	5
AC 85 x 105		10.5	

Order multiple is std. pkg.

- UL Listed – for use with T&B Covers
- For “H” Taps, “C” Taps, two-way connectors, mechanical taps, and Color-Keyed® lugs and joints
- Material: 6 mil vinyl backing, butyl rubber mastic adhesive thickness 1/8 in. approx. Polyethylene release sheet
- Not for submersion in liquid

Adhesive Insulator Cat. Nos.	Compression Lug Cat. Nos.									Compression Two-Way Connector Cat. Nos.			“H” Tap Cat. Nos.	“C” Tap Cat. Nos.	Compression Cable Joint Cat. Nos.	
AC5X3 Size Key #2	60096	60113	60130	60150	54132	54145	54160	54207	54906	54860	60500	–	54806	63105	54710	54610
	60097	60114	60150	60151	54134	54108	54162	54208	54942	54862	60501	–	54807	–	54715	54615
	60099	60016	60230	60230	54105	54147	54163	54255	54947	54864	60507	–	54806	–	54720	54620
	60101	60017	60236	60236	54135	54148	54111	54209	54909	54866	60512	–	54504	–	54725	54625
	60102	60018	60238	60238	54136	54150	54165	54210	54910	–	60516	–	54505	–	54730	54630
	60103	60120	60242	60242	54138	54152	54167	54260	54965	–	60905	–	54506	–	54735	54635
	60104	60122	60244	60244	54106	54153	54168	54211	54970	–	60910	–	54507	–	54740	–
	60106	60123	60248	60248	54139	54109	54112	54265	54850	–	60915	–	54506	–	54745	–
	60107	60124	60250	60250	54140	5415	54170	54212	54852	–	60920	–	54509	–	54750	–
	60108	60126	54104	54104	54107	54157	54204	54270	54854	–	60925	–	54500	–	–	–
	60109	60128	54130	54130	54142	54158	54205	54930	54856	–	54804	–	54511	–	–	–
	60112	60129	54131	54131	54143	54110	54206	54905	54858	–	54805	–	–	–	–	–
	AC 5 x 7 Size Key #4	–	60152	60169	60267	54173	54115	54129	54222	54920	–	60522	60945	54516	63110	54755
–		60153	60174	60268	54174	54183	54213	54291	54923	–	60530	60950	54518	63115	54760	54645
–		60154	60172	60269	54113	54116	54275	54223	54928	–	60538	60955	54809	63120	54765	54650
–		60156	60174	60271	58161	54185	54214	54295	54868	–	60542	60960	54810	63125	54770	–
–		60157	60176	60276	58162	54118	54280	54224	54870	–	60548	60965	54811	–	54775	–
–		60159	60178	60274	58163	54187	54215	54226	54872	–	60554	60970	54812	–	54780	–
–		60160	60180	60275	58165	54120	54282	54228	54874	–	60560	54509	54813	–	–	–
–		60162	60254	60276	58166	54122	54216	54913	54876	–	60565	54510	54814	–	–	–
–		60163	60256	60277	54178	54123	54218	54914	54878	–	60568	54511	54815	–	–	–
–		60165	60260	60278	54179	54124	54286	54915	54880	–	60574	54512	54816	–	–	–
–		60166	60262	60280	54114	54126	54220	54916	54882	–	60930	54513	54817	–	–	–
–		60168	60265	54172	54181	54128	54289	54918	–	–	60935	54514	–	–	–	–
–		–	–	–	–	–	–	–	–	–	60940	54515	–	–	–	–
AC85 x 75 Size Key #6	–	–	–	–	60184	–	–	–	–	–	60574	–	54522	63130	–	–
	–	–	–	–	60284	–	–	–	–	–	60576	–	54523	63135	–	–
	–	–	–	–	–	–	–	–	–	–	60578	–	54524	63140	–	–
	–	–	–	–	–	–	–	–	–	–	60580	–	54526	63145	–	–
	–	–	–	–	–	–	–	–	–	–	60584	–	54528	63150	–	–
	–	–	–	–	–	–	–	–	–	–	60975	–	54820	–	–	–
	–	–	–	–	–	–	–	–	–	–	60980	–	54823	–	–	–
	–	–	–	–	–	–	–	–	–	–	60985	–	54828	–	–	–
	–	–	–	–	–	–	–	–	–	–	54520	–	–	–	–	–
AC85 x 105 Size Key #8	–	–	–	–	–	–	–	–	–	–	–	–	–	63155	–	–
	–	–	–	–	–	–	–	–	–	–	–	–	–	63160	–	–
	–	–	–	–	–	–	–	–	–	–	–	–	–	63165	–	–