

CABLESMART® 40N2 SERIES RACEWAY

Two-Piece, Dual-Channel, Large




Two-piece, dual-channel, large raceway. Lightweight and easy-to-install. Ideal for both power and communication installations.

CODE REFERENCE

cULus Listed Raceway:
File E90378 Guide RJTX.
Complies with flammability requirements of UL-5A.

Fittings: File E90377 Guide RJYT.
Meets Article 388 of NEC.
UL Listed for up to 600V.
Meets Section 12-1600 of CEC.

CableSmart 40N2 Series Raceway System Layout

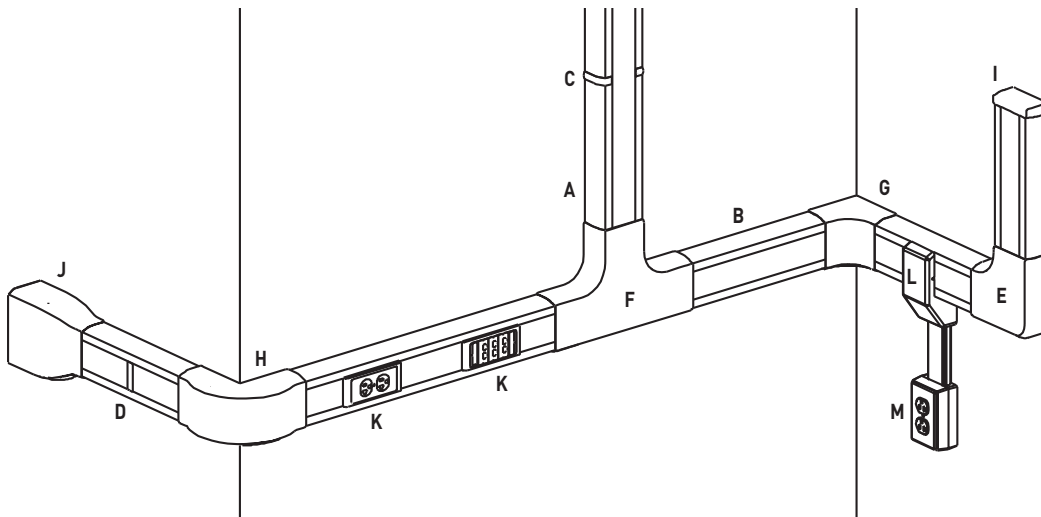

NOTE: Illustration is for showing product applications only.

KEY

- | | | |
|-----------------------------------|---------------------------------------|---|
| A. 40N2B08 Raceway Base | F. 40N2F15 Bend Radius Tee | J. 40N2F21 Divided Entrance End Fitting |
| B. 40N2C08 Raceway Cover | G. 40N2F17 Bend Radius Internal Elbow | K. 40N2F31 Twin Cover Device Bracket |
| C. 40N2F05 Base Clip | H. 40N2F19 Bend Radius External Elbow | L. 40N2F74 Divided Transition Fitting |
| D. 40N2F06 Cover Clip | I. 40N2F20 Blank End Fitting | M. PSB1 One-Gang Device Box |
| E. 40N2F11 Bend Radius Flat Elbow | | |

COLOR OPTIONS



Cablesmart® 40N2 Series Raceway Part Numbers with a "V" suffix are available in an ivory finish. Part Numbers with a "WH" suffix have a white finish. 40N2 Series Raceway is paintable using latex paint or stain.

Custom color options are also available. Consult the factory for more information.


CABLESMART® 40N2 SERIES RACEWAY

Ordering Information

Cablesmart 40N2 Series Raceway Interconnectivity Fittings


CONNECTION REQUIRED FROM	TO	USE CATALOG NUMBER
1/2" or 3/4" trade size Conduit	40N2 Series Raceway	40N2F20
3/4", 1", 1 1/4" & 1 1/2" trade size conduit or armored cable	40N2 Series Raceway	40N2F21
40N2 Series Raceway	PN03, PN05, PN10 Series Raceways	40N2F74

40N2F11 Radiused Full Capacity Flat Elbow




A 90° flat corner with integral dividers to provide 2" [51mm] cable bend radius for UTP and fiber optic installations. Ideal for lay-in or pull-through installations. Available in ivory (40N2F11V) or white (40N2F11WH).

40N2F15 Radiused Full Capacity Tee




For branches at right angles. A full capacity tee fitting that provides separation of services and 2" [51mm] cable bend radius for UTP and fiber optic installations. Available in ivory (40N2F15V) or white (40N2F15WH).

40N2F17 Radiused Full Capacity Internal Elbow




A 90° internal corner with integral dividers to provide 2" [51mm] cable bend radius for UTP and fiber optic installations. Ideal for lay-in or pull-through installations. Available in ivory (40N2F17V) or white (40N2F17WH).

40N2F19 Radiused Full Capacity External Elbow




A 90° external corner with integral dividers to provide 2" [51mm] cable bend radius for UTP and fiber optic installations. Ideal for lay-in or pull-through installations. Available in ivory (40N2F19V) or white (40N2F19WH).

40N2F20 Blank End Fitting




Closes off raceway end runs. Can be used to feed raceway using 1/2" or 3/4" trade size conduit. Holes for conduit must be drilled. Use a step drill or other means. Available in ivory (40N2F20V) or white (40N2F20WH).

40N2F21 Divided Entrance End Fitting



FiberReady divided fitting to feed 40N2 Series Raceway. Includes 3/4", 1", 1 1/4", and 1 1/2" trade size KOs on back and top. Available in ivory (40N2F21V) or white (40N2F21WH).

40N2F31 Twin Cover Device Bracket




Used for power or communications devices in a single compartment. Accepts 5507 Series™ Faceplates. For use with Ortronics® TracJack Individual Jack System, Ortronics® Series II Front-Loading, Module System

Wiremold Open System Communication Modules. Available in ivory (40N2F31V) or white (40N2F31WH).


NOTE: CM-EPLA End Plates are required when using Wiremold communication modules and Pass & Seymour® inserts. S2-EPL End Plates are required when using Ortronics® Series II inserts. To mount TracJack inserts, use 5507-4TJ or 5507-6TJ Faceplates.

40N2F55 High Capacity Device Box



Required for mounting power or datacom devices into a divided raceway application. One used per device location.

40N2F74 Divided Transition Fitting



Makes transition from 40N2 Series Raceway to PN03, PN05, and PN10 Series Raceways. Available in ivory (40N2F74V) or white (40N2F74WH).