

POWER COMMANDER® PLUS SERIES



Power Commander® Plus High Current Power Distribution Units offer the capacity to meet the ever-increasing power demands of data centers.

NOTE: We are continually upgrading circuitry and features to provide the best possible power distribution solutions; therefore, the products in this section of the catalog may change without notice. Contact the factory for additional information.

CODE REFERENCE

cTUVus Listed:
File 30783215.002 EN60950-1

A Hub assembly of a Power Commander Plus PDU showing circuit breakers and LEDs.



C13 Receptacle
(Rated 15A)



C19 Receptacle
(Rated 20A)




POWER COMMANDER® PLUS SERIES

Ordering Information

Power Commander Plus Series 60 Amp PDU Ordering Information – 120/208 System, 120V Output

6B21E, 6W21E

6B21E, 6W21E

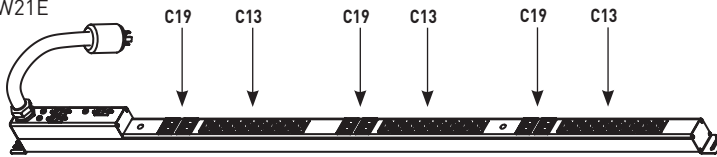

Two (2) C19 outlets per circuit, eight (8) C13 outlets per circuit. Black (6B) or White (6W) top cover.


Length	64.12" 67.12"	[1.63m] overall, [1.70m] with mounting ears.
Hub Length	10.12"	[257mm]
Width	2.00"	[50.8mm]
Depth	1.95" 3.20"	[49.5mm], [81.3mm] with hub
Mounting	66.0"	[1.68m] center-to-center

AC Voltage Input	120/208V
AC Voltage Output	100 to 127V
Frequency	60 Hz
Load Capacity	30 Amps 3-phase, derated to 24 Amps: 3 – 20 Amp Circuits derated to 16 Amps (Circuits 1, 2 & 3)
Circuit Breaker	3 – 20 Amp (Circuits 1, 2 & 3), UL489 Listed
Output Receptacles	NEMA 5-20R, IEC C13 or IEC C19
Product Warranty	2 years
Power Cord	10/5 SOOW Type, L21-30P Plug, 10' [3.05m]

Power Commander Plus Series 60 Amp PDU Ordering Information – 120/208 System, 208V Output

6B22E, 6W22E

6W22E

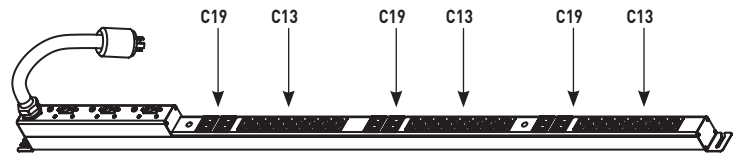

Two (2) C19 outlets per circuit, eight (8) C13 outlets per circuit. Black (6B) or White (6W) top cover.

Length	64.12" 67.12"	[1.63m] overall, [1.70m] with mounting ears.
Hub Length	14.12"	[359mm]
Width	2.00"	[50.8mm]
Depth	1.95" 3.20"	[49.5mm], [81.3mm] with hub
Mounting	66.0"	[1.68m] center-to-center

AC Voltage Input	120/208V
AC Voltage Output	200 to 230V
Frequency	60 Hz
Load Capacity	30 Amps 3-phase, derated to 24 Amps: 3 – 20 Amp Circuits derated to 16 Amps (Circuits 1, 2 & 3)
Circuit Breaker	3 – 20 Amp (Circuits 1, 2 & 3), UL489 Listed
Output Receptacles	IEC C13 or IEC C19
Product Warranty	2 years
Power Cord	10/5 SOOW Type, L21-30P Plug, 10' [3.05m]