

CABINETMATE™ SERIES

Surge Protected Products



CabinetMate Series Plug-In Outlet Center Units offer a low profile aluminum housing to save space.

NOTE: We are continually upgrading circuitry and features to provide the best possible power distribution solutions; therefore, the products in this section of the catalog may change without notice. Contact the factory for additional information.

CODE REFERENCE

cULus Listed: File E66421
Guide XYBS, XUHT, VZCA

Surge Suppression Specifications

Surge Protection Circuitry	Single Stage
Maximum Surge Current	36,000 Amps (12,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G)
Noise Reduction	+35dB
Response Time	Less than 1 nanosecond


NOTE: See the Joule explanation later in this section.

CabinetMate Series Mounting Information

MOUNTING TYPES

Each Cabinet Power Solution can be mounted via included spring clip hardware. Complete mounting hardware and installation instructions are included with every unit.

8002 Spring Clip




Mount unit in any position. Includes two spring steel mounting clips that snap onto the unit. Screws also included. Used for all units with 1 1/2" [38mm] narrow aluminum housing.

CABINETMATE™ SERIES

Power Only Products

CabinetMate Series Power Only Plug-In Outlet Centers Ordering Information

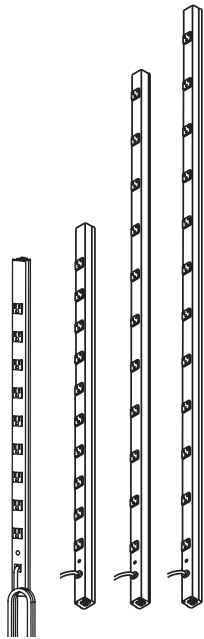

Locking Plug

All units feature gray aluminum housing 1 1/2" x 1 3/16" [38mm x 30mm] with black receptacles and black power cord with straight blade plug.

Units with "-TL" suffix have twist lock plug

3609ULBC, 3609ULBD Plug-In Outlet Center Unit

Nine outlets, 6' [1.8m] (3609ULBC) or 15' [4.6m] (3609ULBD) cord. Length 36" [915mm]. Receptacle center-to-center 3" [76mm]. 15 Amp unit with a 15A resettable circuit breaker.

4810ULBC, 4810ULBD Plug-In Outlet Center Unit

Ten outlets, 6' [1.8m] (4810ULBC) or 15' [4.6m] (4810ULBD) cord. Length 48" [1.2m]. Receptacle center-to-center 4" [101mm]. 15 Amp unit with a 15A resettable circuit breaker.

7011ULBC, 7011ULBD Plug-In Outlet Center Unit

Eleven outlets, 6' [1.8m] (7011ULBC) or 15' [4.6m] (7011ULBD) cord. Length 70" [1.8m]. Receptacle center-to-center 6" [152mm]. 15 Amp unit with a 15A resettable circuit breaker.

7712ULBC, 7712ULBD Plug-In Outlet Center Unit

Twelve outlets, 6' [1.8m] (7712ULBC) or 15' [4.6m] (7712ULBD) cord. Length 77" [2m]. Receptacle center-to-center 6" [152mm]. 15 Amp unit with a 15A resettable circuit breaker.

2008ULBC20R, 2008ULBD20R, 2008ULBC20R-TL, 2008ULBD20R-TL Plug-In Outlet Center Unit

Eight 20A outlets with t-slots, 6' [1.8m] (2008ULBC20R, 2008ULBC20R-TL) or 15' [4.6m] (2008ULBD20R, 2008ULBD20R-TL) cord. Length 20" [508mm]. Receptacle center-to-center 1 1/4" [32mm]. 20 Amp unit with a 20A resettable circuit breaker. Units available with straight blade or Locking Plug (2008ULBC20R-TL, 2008ULBD20R-TL).

4810ULBC20R, 4810ULBD20R, 4810ULBC20R-TL, 4810ULBD20R-TL Plug-In Outlet Center Unit

Ten 20A outlets with t-slots, 6' [1.8m] (4810ULBC20R, 4810ULBC20R-TL) or 15' [4.6m] (4810ULBD20R, 4810ULBD20R-TL) cord. Length 48" [1.2m]. Receptacle center-to-center 4" [101mm]. 20 Amp unit with a 20A resettable circuit breaker. Units available with straight blade or Locking Plug (4810ULBC20R-TL, 4810ULBD20R-TL).

7011ULBC20R, 7011ULBD20R, 7011ULBC20R-TL, 7011ULBD20R-TL Plug-In Outlet Center UNIT

Eleven 20A outlets with t-slots, 6' [1.8m] (7011ULBC20R, 7011ULBC20R-TL) or 15' [4.6m] (7011ULBD20R, 7011ULBD20R-TL) cord. Length 70" [1.8m]. Receptacle center-to-center 6" [152mm]. 20 Amp unit with a 20A resettable circuit breaker. Units available with straight blade or Locking Plug (7011ULBC20R-TL, 7011ULBD20R-TL).

7712ULBC20R, 7712ULBD20R, 7712ULBC20R-TL, 7712ULBD20R-TL Plug-In Outlet Center UNIT

Twelve 20A outlets with t-slots, 6' [1.8m] (7712ULBC20R, 7712ULBC20R-TL) or 15' [4.6m] (7712ULBD20R, 7712ULBD20R-TL) cord. Length 77" [2m]. Receptacle center-to-center 6" [152mm]. 20 Amp unit with a 20A resettable circuit breaker. Units available with straight blade or Locking Plug (7712ULBC20R-TL, 7712ULBD20R-TL).