

# WORKSTATION POWER SOLUTIONS



Work Station Power Solutions are point-of-use, plug-in outlet centers available with and without surge suppression.

## CODE REFERENCE

**cULus Listed:** File E66421  
Guide XYBS, XUHT, VZCA

## Surge Suppression Specifications

### Sentrex® High Performance Surge Specifications

Surge Protection Circuitry	3 Element, 3-Stage Hybrid Circuit
Maximum Surge Current	56,000 Amps [32,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G]
Noise Reduction	+50dB
Response Time	Less than 1 nanosecond

**NOTE:** See the Joule explanation located on the Cabinet Power Solutions page 626.

### Perma-Power® Computer Grade Surge Specifications

Surge Protection Circuitry	Single Stage
Maximum Surge Current	36,000 Amps [12,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G]
Noise Reduction	+35dB
Response Time	Less than 1 nanosecond


## Mounting Information

### MOUNTING TYPES

Each Plug-In Outlet Center unit has one of three different mounting types. Each mounting method has been designed to optimize the performance of the product. Complete mounting hardware and installation instructions are included with every unit.


#### Snap-On/Slide-Off

Mount unit in any position. Catalog No. 8004 includes two aluminum mounting clips that snap onto mounting rails on the back of the unit. Screws also included. Used for all units with 2" [51mm] aluminum housing.




#### Keyhole Mounting

Mount unit in almost any position. Screws not included. Available on all plastic units and units with 3 1/2" [89mm] aluminum housing.



#### Spring Clip Mounting

Mount unit in any position. Catalog No. 8002 includes two spring steel mounting clips that snap onto the unit. Screws also included. Used for all units with 1 1/2" [38mm] narrow aluminum housing.

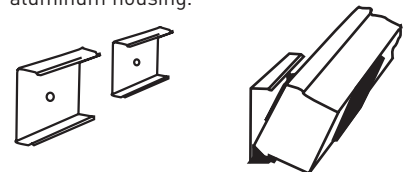

## COLOR OPTIONS



Workstation Power Solutions Plug-In Outlet Center Units Part Number descriptions indicate available color options.

# WORKSTATION POWER SOLUTIONS

Ordering Information


## Work Station Power Solutions – Surge Protected Plug-In Outlet Center Units Ordering Information

### M5S Plug-In Outlet Center Units



Sentrex® high performance surge protection. Five outlets, lighted switch, durable putty white aluminum housing, 15A. Receptacles rotated 90° and spaced to accommodate transformers. Length 24" [610mm]. 6' [1.8m] 14/3 SJT putty white cord with NEMA5-15 plug. Snap-on, slide-off mounting.


### M6BZNET, M6BZNET-15 Plug-In Outlet Center Units



Six outlets, two spaced for transformers. Lighted switch, data line protector with RJ45 jacks. 6' [1.8m] (M6BZNET) or 15' [4.6m] (M6BZNET-15) power cord with 45° right angle plug. Length 18" [457mm].


Right Angle Plug

### M6S, M6S-15 Plug-In Outlet Center Units




Sentrex® high performance surge protection. Six outlets, lighted switch, durable putty white aluminum housing, 15A. 6' [1.8m] (M6S) or 15' [4.6m] (M6S-15) 14/3 SJT putty white cord with NEMA5-15 plug. Length 15 1/4" [387mm]. Snap-on, slide-off mounting.

### M6BZR, M6BZR-15 Plug-In Outlet Center Units




Perma Power® computer grade surge protection. Six outlets, remote switch, durable putty white aluminum housing, 15A, 6' [1.8m] (M6BZR) or 15' [4.6m] (M6BZR-15) 14/3 SJT putty white cord with NEMA5-15 plug. Length 13 1/4" [337mm]. Snap-on, slide-off mounting.

### M5BZ Plug-In Outlet Center Units




Perma Power® computer grade surge protection. Five outlets, lighted switch, durable putty white aluminum housing, 15A. Receptacles rotated 90° and spaced to accommodate transformers. 6' [1.8m] 14/3 SJT putty white cord with NEMA5-15 plug. Length 21" [533mm]. Snap-on, slide-off mounting.

### M620BZLS, M620BZLS-15 Plug-In Outlet Center Units




Perma Power® computer grade surge protection. Six outlets, lighted switch, durable putty white aluminum housing, 20A. 6' [1.8m] (M620BZLS) or 15' [4.6m] (M620BZLS-15) 12/3 SJT putty white cord with NEMA5-20 plug. Length 18" [457mm]. Snap-on, slide-off mounting.

### M6BZ, M6BZ-15 Plug-In Outlet Center Units



Perma Power® computer grade surge protection. Six outlets, lighted switch, durable putty white aluminum housing, 15A. 6' [1.8m] (M6BZ) or 15' [4.6m] (M6BZ-15) 14/3 SJT putty white cord with NEMA5-15 plug. Length 13 1/4" [337mm]. Snap-on, slide-off mounting.

### SR10N Plug-In Outlet Center Units



Basic surge protection. Six outlets, lighted switch, impact-resistant putty white polymeric housing, 15A. 6' [1.8m] 14/3 SJT putty white cord with NEMA5-15 plug. Maximum surge current 6500 Amps. 13 1/4" x 2 1/2" x 1 9/16" [337mm x 64mm x 40mm]. Keyhole mounting.