

WORKSTATION POWER SOLUTIONS



Work Station Power Solutions are point-of-use, plug-in outlet centers available with and without surge suppression.

CODE REFERENCE

cULus Listed: File E66421
Guide XYBS, XUHT, VZCA

Surge Suppression Specifications

Sentrex® High Performance Surge Specifications

Surge Protection Circuitry	3 Element, 3-Stage Hybrid Circuit
Maximum Surge Current	56,000 Amps [32,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G]
Noise Reduction	+50dB
Response Time	Less than 1 nanosecond

NOTE: See the Joule explanation located on the Cabinet Power Solutions page 626.

Perma-Power® Computer Grade Surge Specifications

Surge Protection Circuitry	Single Stage
Maximum Surge Current	36,000 Amps [12,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G]
Noise Reduction	+35dB
Response Time	Less than 1 nanosecond


Mounting Information

MOUNTING TYPES

Each Plug-In Outlet Center unit has one of three different mounting types. Each mounting method has been designed to optimize the performance of the product. Complete mounting hardware and installation instructions are included with every unit.


Snap-On/Slide-Off

Mount unit in any position. Catalog No. 8004 includes two aluminum mounting clips that snap onto mounting rails on the back of the unit. Screws also included. Used for all units with 2" [51mm] aluminum housing.

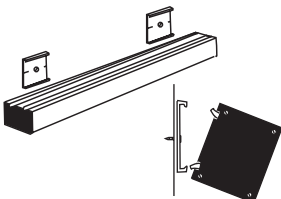


Keyhole Mounting

Mount unit in almost any position. Screws not included. Available on all plastic units and units with 3 1/2" [89mm] aluminum housing.




Spring Clip Mounting

Mount unit in any position. Catalog No. 8002 includes two spring steel mounting clips that snap onto the unit. Screws also included. Used for all units with 1 1/2" [38mm] narrow aluminum housing.

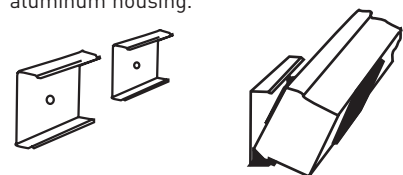

COLOR OPTIONS




Workstation Power Solutions Plug-In Outlet Center Units Part Number descriptions indicate available color options.

WORKSTATION POWER SOLUTIONS

Ordering Information


Work Station Power Solutions – Power Only Plug-In Outlet Center Units Ordering Information

SRD10N Plug-In Outlet Center Units




Basic surge protection. Six outlets, lighted switch, impact-resistant putty white polymeric housing, 15A. 6' [1.8m] 14/3 SJT putty white cord with NEMA5-15 plug. Maximum surge current 6500 Amps. Phone/fax protection. 13 1/4" x 2 1/2" x 1 9/16" [337mm x 64mm x 40mm]. Keyhole mounting.

PR609N Plug-In Outlet Center Units



Perma Power® basic surge protection. Six outlet wall plug, impact-resistant putty white polymeric housing, 15A. Maximum surge current 6500 Amps. 5" x 3 3/8" x 1 3/4" [127mm x 86mm x 44mm].

PR610N Plug-In Outlet Center Units



Basic surge protection. Six outlets, lighted switch, impact-resistant putty white polymeric housing, 15A. 6' [1.8m] 14/3 SJT putty white cord with NEMA5-15 plug. Maximum surge current 6500 Amps. 11 3/4" x 2 1/4" x 1 1/2" [298mm x 57mm x 38mm]. Keyhole mounting.

Work Station Power Solutions – Power Only Plug-In Outlet Center Units Ordering Information

UL300BC, UL300BD Plug-In Outlet Center Units



Eight outlets, lighted switch, rugged gray aluminum housing, 15A, 6' [1.8m][UL300BC] or 15' [4.6m] [UL300BD] 14/3 SJT black cord with NEMA5-15 plug. Length 24" [609mm]. Receptacle center-to-center 2" [51mm]. Snap-on, slide-off mounting.

UL401BC, UL401BD Plug-In Outlet Center Units



Eight outlets, lighted switch, rugged gray aluminum housing, 15A, 6' [1.8m][UL401BC] or 15' [4.6m] [UL401BD] 14/3 SJT black cord with NEMA5-15 plug. Length 48" [1.2m]. Receptacle center-to-center 5 1/4" [133mm]. Snap-on, slide-off mounting.

UL309BC, UL309BD Plug-In Outlet Center Units



Nine outlets, lighted switch, rugged gray aluminum housing, 15A, 6' [1.8m][UL309BC] or 15' [4.6m] [UL309BD] 14/3 SJT black cord with NEMA5-15 plug. Length 36" [915mm]. Receptacle center-to-center 3" [76mm]. Snap-on, slide-off mounting.

UL402BC, UL402BD Plug-In Outlet Center Units



Sixteen outlets, lighted switch, rugged gray aluminum housing, 15A, 6' [1.8m][UL402BC] or 15' [4.6m] [UL402BD] 14/3 SJT black cord with NEMA5-15 plug. Length 48" [1.2m]. Receptacle center-to-center 2 1/2" [64mm]. Snap-on, slide-off mounting.