


Fork Terminals


Vinyl-Insulated Locking Forks — Expanded Insulation




CAT. NO.	PKG. QTY.	WIRE RANGE	MAX. INS.	BOLT HOLE	REC. TOOL	DIMENSIONS				STOCK THICK.	
						A	B	C	M		
18RA-6FLX	100	22-16	.170	#6	ERG4001	.97	.25	.25	.81	.02	
RA2217-170	1,000	22-16	.170	#6		.97	.25	.25	.81		
18RA-8FLX	100	22-16	.170	#8		.97	.29	.25	.81		
18RA-10FLX	100	22-16	.170	#10		.97	.29	.25	.81		
RA2257-170	1,000	22-16	.170	#10		.97	.29	.25	.81		
14RB-6FLX	100	18-14	.200	#6		.97	.31	.27	.81		.03
RB2207-200	1,000	18-14	.200	#6		.97	.31	.27	.81		
RB2217-200	1,000	18-14	.200	#6		.97	.29	.27	.81		
14RB-8FLX	100	18-14	.200	#8		.97	.31	.27	.81		
RB2237-200	1,000	18-14	.200	#8		.97	.31	.27	.81		
14RB-10FLX	100	18-14	.200	#10	.97	.31	.27	.81			
RB2257-200	1,000	18-14	.200	#10	.97	.31	.27	.81			
10RC-6FLX	50	12-10	.250	#6	ERG4002	1.07	.31	.27	.91	.04	
RC2207-250	500	12-10	.250	#6		1.07	.31	.27	.91		
10RC-8FLX	50	12-10	.250	#8		1.10	.37	.27	.91		
10RC-10FLX	50	12-10	.250	#10		1.10	.37	.27	.91		
RC2227-250	500	12-10	.250	#10		1.10	.37	.27	.91		
10RC-14FLX	50	12-10	.250	¼"		1.22	.50	.32	.96		

For multiple wire combinations per UL File E9609, see page G-8.

Non-Insulated Forks



CAT. NO.	PKG. QTY.	WIRE RANGE	BOLT HOLE	REC. TOOL	DIMENSIONS				STOCK THICK.		
					A	B	C	M			
A18-6F	100	22-16	#6	ERG4002	.72	.25	.27	.59	.02		
A116	1,000	22-16	#6		.72	.25	.27	.59			
A18-8F	100	22-16	#8		.75	.31	.27	.59			
A114	1,000	22-16	#8		.75	.31	.27	.59			
A18-10F	100	22-16	#10		.75	.31	.27	.59			
A115-TB	1,000	22-16	#10		.75	.31	.27	.59			
B14-6F	100	18-14	#6	ERG4002 ERG4005	.75	.31	.27	.59	.03		
B64	1,000	18-14	#6		.75	.31	.27	.59			
B19	1,000	18-14	#6		.66	.25	.13	.50			
B14-8F	100	18-14	#8		.75	.31	.27	.59			
B65-TB	1,000	18-14	#8		.75	.31	.27	.59			
B14-10F	100	18-14	#10		.75	.31	.27	.59			
B115	1,000	18-14	#10		.75	.31	.27	.59			
B14-14F	100	18-14	¼"		.90	.44	.38	.68			
C10-6F	50	12-10	#6		ERG4002 ERG4005	.77	.31	.27		.63	.04
C133	500	12-10	#6			.77	.31	.27		.63	
C10-8F	50	12-10	#8	.82		.38	.27	.63			
C114	500	12-10	#8	.82		.38	.27	.63			
C10-10F	50	12-10	#10	.82		.38	.27	.63			
C115	500	12-10	#10	.82		.38	.27	.63			
C10-14F	50	12-10	¼"	.98		.50	.37	.73			
C116-TB	500	12-10	¼"	.98		.50	.37	.73			

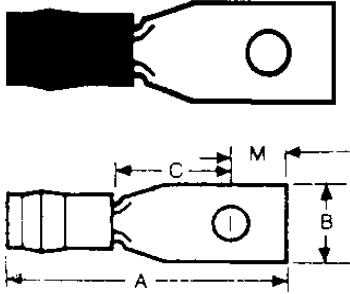

Stock Thickness:

RA & RB = .03

RC = .04

Note:

22-18 ga. = 1-2 Navy

16-14 ga. = 2½-4 Navy

12-10 ga. = 6-9 Navy

Nylon Insulated Rectangular L80



Cat. No.	Stud Size	Wire Range	Dimensions				Bu-Ships Tongue Shape
			A	B	C	M	
Series RA							
RA486	#4	22-18	.796	.237	.237	.143	L86P-1
RA485	#4	22-18	1.015	.237	.404	.195	L85P-1
RA483	#5	22-18	.859	.277	.277	.143	L83P-1
RA484	#6	22-18	1.015	.237	.404	.195	L84P-1
RA481	#6	22-18	1.109	.302	.465	.227	L81P-1
RA482	#8	22-18	1.109	.302	.465	.227	L82P-1
RA480**	#8	22-18	1.359	.390	.621	.310	L80P-1
Series RB							
RB486	#4	16-14	.796	.237	.237	.143	L86P-2
RB485	#4	16-14	1.015	.237	.404	.195	L85P-2
RB483	#5	16-14	.859	.277	.277	.143	L83P-2
RB484	#6	16-14	1.015	.237	.404	.195	L84P-2
RB481	#6	16-14	1.109	.302	.465	.227	L81P-2
RB482	#8	16-14	1.109	.302	.465	.227	L82P-2
RB480**	#8	16-14	1.359	.390	.621	.310	L80P-2
Series RC							
RC486	#4	12-10	.984	.237	.237	.143	L86P-3
RC485	#4	12-10	1.187	.237	.404	.195	L85P-3
RC483	#5	12-10	1.046	.277	.277	.143	L83P-3
RC484	#6	12-10	1.203	.237	.404	.195	L84P-3
RC481	#6	12-10	1.281	.302	.465	.227	L81P-3
RC482	#8	12-10	1.281	.302	.465	.227	L82P-3
RC480**	#8	12-10	1.531	.390	.621	.310	L80P-3

** Not available on tape.

Note: RA, RB, RC486 for use with BU-Ships terminal board types 26TB. RA, RB, RC485 for use with 25TB and 27TB. RA, RB, RC483 for use with 8TB. RA, RB, RC484 for use with 10TB and 11TB. RA, RB, RC481 for use with 6TB, 7TB and 9TB. RA, RB, RC482 for use with 15TB. RA, RB, RC480 for use with 3TB, 4TB, 5TB, 16TB, 17TB and 18TB.

Note: When ordering terminals on tape add the suffix **M**, example: (RA250M), to the catalog number.

U.L. Listed E9809

Installing Tools: ERG2001, WT145C

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies). See page O1149.

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)