


## Very HRC Fuses 6x32 125V to 250V - FA Very Fast Acting

Approvals UL recognized E 76491

FROM 0,1 TO 30A

### Dimensions

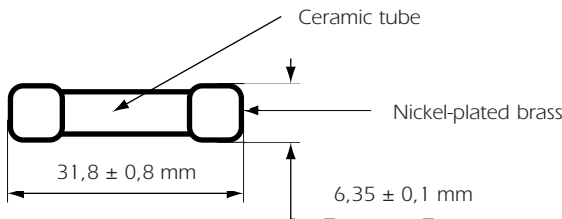

Fuses with filler  
Max weight : 2,5 g

### Basic Characteristics

| Size     | Rated Voltage | Rated Current                    | Breaking Capacity                | [I <sup>2</sup> t] Pre-arcing | [I <sup>2</sup> t] Total clearing at Un | Max voltage drop at In | Designation           | Reference Number | Catalog Number |
|----------|---------------|----------------------------------|----------------------------------|-------------------------------|---|------------------------|-----------------------|------------------|----------------|
| mm       | VAC           | A                                |                                  | A <sup>2</sup> s              |   | V                      |                       |                  |                |
| 6,3 x 32 | 250           | 0,100                            | 200 kA<br>250 VAC<br>cos φ ≥ 0,2 | 0,00057                       | 0,0011                                  | 2,75                   | 250 V FA 0,100 A 6x32 | R094315          | MI6FA25V0,1    |
|          |               | 0,125                            |                                  | 0,00077                       | 0,0015                                  | 2,60                   | 250 V FA 0,125 A 6x32 | F084323          | MI6FA25V0,125  |
|          |               | 0,160                            |                                  | 0,002                         | 0,004                                   | 2                      | 250 V FA 0,160 A 6x32 | G084301          | MI6FA25V0,16   |
|          |               | 0,200                            |                                  | 0,0046                        | 0,009                                   | 1,7                    | 250 V FA 0,200 A 6x32 | C084320          | MI6FA25V0,2    |
|          |               | 0,250                            |                                  | 0,009                         | 0,018                                   | 1,55                   | 250 V FA 0,250 A 6x32 | H084302          | MI6FA25V0,25   |
|          |               | 0,315                            |                                  | 0,016                         | 0,032                                   | 1,45                   | 250 V FA 0,315 A 6x32 | D084321          | MI6FA25V0,315  |
|          |               | 0,400                            |                                  | 0,03                          | 0,06                                    | 1,4                    | 250 V FA 0,400 A 6x32 | E084322          | MI6FA25V0,4    |
|          |               | 0,500                            |                                  | 0,05                          | 0,1                                     | 1,4                    | 250 V FA 0,500 A 6x32 | J084303          | MI6FA25V0,5    |
|          |               | 0,630                            |                                  | 0,12                          | 0,24                                    | 1,15                   | 250 V FA 0,630 A 6x32 | B084319          | MI6FA25V0,63   |
|          |               | 0,800                            |                                  | 0,25                          | 0,5                                     | 1                      | 250 V FA 0,800 A 6x32 | G084324          | MI6FA25V0,8    |
|          |               | 1,000                            |                                  | 0,11                          | 0,2                                     | 0,71                   | 250 V FA 1,000 A 6x32 | K084304          | MI6FA25V1      |
|          |               | 1,250                            |                                  | 0,26                          | 0,5                                     | 0,55                   | 250 V FA 1,250 A 6x32 | L084305          | MI6FA25V1,25   |
|          |               | 1,600                            |                                  | 0,39                          | 0,7                                     | 0,65                   | 250 V FA 1,600 A 6x32 | M084306          | MI6FA25V1,6    |
|          |               | 2,000                            |                                  | 0,81                          | 1,4                                     | 0,55                   | 250 V FA 2,000 A 6x32 | N084307          | MI6FA25V2      |
|          |               | 2,500                            |                                  | 1,44                          | 2,5                                     | 0,52                   | 250 V FA 2,500 A 6x32 | P084308          | MI6FA25V2,5    |
|          |               | 3,150                            |                                  | 2,46                          | 4,3                                     | 0,53                   | 250 V FA 3,150 A 6x32 | Q084309          | MI6FA25V3,15   |
|          |               | 4,000                            |                                  | 4,6                           | 8                                       | 0,48                   | 250 V FA 4,000 A 6x32 | R084310          | MI6FA25V4      |
|          |               | 5,000                            |                                  | 11                            | 20                                      | 0,37                   | 250 V FA 5,000 A 6x32 | S084311          | MI6FA25V5      |
|          |               | 6,300                            |                                  | 23                            | 40                                      | 0,31                   | 250 V FA 6,300 A 6x32 | T084312          | MI6FA25V6,3    |
|          | 8             | 1,5                              | 25                               | 0,19                          | 250 V FA 8,000 A 6x32                   | V084313                | MI6FA25V8             |                  |                |
|          | 10            | 2,5                              | 42                               | 0,19                          | 250 V FA 10,00 A 6x32                   | W084314                | MI6FA25V10            |                  |                |
| 12,5     | 3,8           | 60                               | 0,2                              | 250 V FA 12,50 A 6x32         | X084315                                 | MI6FA25V12,5           |                       |                  |                |
| 16       | 7,1           | 115                              | 0,15                             | 250 V FA 16,00 A 6x32         | Z084317                                 | MI6FA25V16             |                       |                  |                |
| 20       | 12,7          | 200                              | 0,14                             | 250 V FA 20,00 A 6x32         | A084318                                 | MI6FA25V20             |                       |                  |                |
| 125      | 25            | 100 kA<br>125 VAC<br>cos φ ≥ 0,2 | 32,5                             | 200                           | 0,14                                    | 125 V FA 25,00 A 6x32  | H084325               | MI6FA12,5V25     |                |
|          | 30            | 61,5                             | 400                              | 0,12                          | 125 V FA 30,00 A 6x32                   | J084326                | MI6FA12,5V30          |                  |                |

Ratings lower than 0,1A : please enquire.