



## EZGround™ Compression Grounding Connectors

### Figure 6 Compression Ground Rod Tap Connector

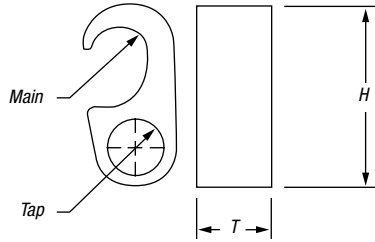


DB MEETS **IEEE** 837 REQUIREMENTS

CAT. NO.	APPLICATION		CABLE TO REBAR APPLICATION		DIMENSIONS (IN.)		DIES FOR TBM 14M, 13100A OR TBM15I
	MAIN	TAP	A GROUND ROD	B CABLE RANGE	T	H	
54855	1/0 Str.–250 kcmil or 1/2"–3/8" Rod	#4 Sol.–#2 Str.	#3 Rebar 3/8" thru 1/2" #4 Rebar	#4 Sol.–#2 Str.	3/4"	1 15/16"	15G86R
54860	1/0 Str.–250 kcmil or 1/2"–3/8" Rod	1/0 Str.–2/0 Str.	#3 Rebar 3/8" thru 1/2" #4 Rebar	1/0 Str.–2/0 Str.	3/4"	2 3/16"	15G86R
54865-CK	1/0 Str.–250 kcmil or 1/2"–3/8" Rod	3/0 Str.–250 kcmil	#3 Rebar 3/8" thru 1/2" #4 Rebar	3/0 Str.–250 kcmil	3/4"	2 3/16"	15G86R
54875	#6 Sol.–#2 Str.	#6 Sol.–#2 Str.	—	—	3/4"	2 3/16"	15501A
54885	250 kcmil–500 kcmil or 5/8"–3/4" Rod	#4 Sol.–#2 Str.	#5 Rebar 3/8" thru 3/4" #6 Rebar	#4 Sol.–#2 Str.	3/4"	1 15/16"	15G126R
54890	250 kcmil–500 kcmil or 5/8"–3/4" Rod	1/0 Str.–2/0 Str.	#5 Rebar 3/8" thru 3/4" #6 Rebar	1/0 Str.–2/0 Str.	3/4"	2 3/16"	15G126R
54895	250 kcmil–500 kcmil or 5/8"–3/4" Rod	3/0 Str.–250 kcmil	#5 Rebar 3/8" thru 3/4" #6 Rebar	3/0 Str.–250 kcmil	3/4"	2 3/16"	15G126R
54900	250 kcmil–500 kcmil or 5/8"–3/4" Rod	350 kcmil–500 kcmil	#5 Rebar 3/8" thru 3/4" #6 Rebar	350 kcmil–500 kcmil	1 3/8"	2 3/16"	15G121R

\* Tin-plated version available for galvanized ground rods. Add suffix -TP.

### Figure 8 Compression Ground Rod Tap Connector

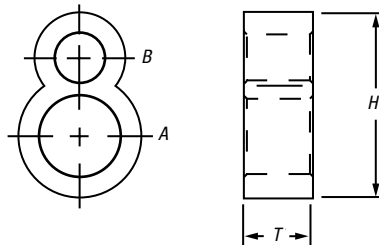

DB MEETS **IEEE** 837 REQUIREMENTS

CAT. NO.	A GROUND ROD	B CABLE RANGE	DIMENSIONS (IN.)		DIES FOR TBM14M, 13100A OR TBM15I
			T	H	
GR12-202	1/2"	#2 AWG–2/0 AWG	7/8"	1 15/16"	15G121R
GR58-202	5/8"	#2 AWG–2/0 AWG	7/8"	1 31/32"	15G121R
GR34-202	3/4"	#2 AWG–2/0 AWG	7/8"	2 3/16"	15G121R
GR1-202	1"	#2 AWG–2/0 AWG	7/8"	2 3/16"	15G121R
GR12-40250	1/2"	3/0 AWG–250 kcmil	7/8"	1 15/16"	15G121R
GR58-40250	5/8"	3/0 AWG–250 kcmil	7/8"	2 1/8"	15G121R
GR34-40250	3/4"	3/0 AWG–250 kcmil	7/8"	2 3/16"	15G121R
GR1-40250	1"	3/0 AWG–250 kcmil	7/8"	2 3/16"	15G121R
GR58-300500	5/8"	300–500 kcmil	7/8"	2 1/8"	15G121R
GR34-300500	3/4"	300–500 kcmil	7/8"	2 3/16"	15G121R
GR1-300500	1"	300–500 kcmil	7/8"	2 11/16"	15G121R