


Grounding Grid Connectors

Heavy-Duty Cast Copper**



53065

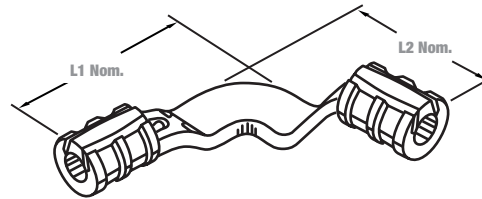

53055



Cat. No.	Rod to Cable Range		Cable to Cable Range Rod		Cable and Rod Installing Dies for TBM14 and 15				Overall Dimensions in. (mm)	
	Rod Size (in.)	Cable Range	Main	Branch	Die Code	Cat. No.	Die Code	Cat. No.	L1	L2
53055	—	—	1/0–2/0 AWG	1/0–2/0 AWG	—	—	66	15534SS [1]	3.88 (98.6)	3.88 (98.6)
53059*	1/2–5/8	2–1 AWG	4/0–250 kcmil	2–1 AWG	87H	15506SS [2]	54H	15511SS [2]	4.16 (105.7)	4.56 (115.8)
53060*		1/0–2/0 AWG		1/0–2/0 AWG			87H	15506SS [2]	4.44 (112.8)	4.44 (112.8)
53065*		4/0–250 kcmil		4/0–250 kcmil			87H		4.44 (112.8)	4.44 (112.8)
53069*	3/4	1/0–2/0 AWG	300–350 kcmil	1/0–2/0 AWG	106H	15515SS [2]	66	15534SS [1]	4.59 (116.6)	4.59 (116.6)
53071*		4/0–250 kcmil		4/0–250 kcmil			106H	15515SS [2]	5.25 (133.4)	4.78 (121.4)
53073*	1	1/0–2/0 AWG	500 kcmil	1/0–2/0 AWG	125H	15603 [3]	66	15534SS [1]	4.81 (122.2)	4.88 (124.0)
53075*		4/0–250 kcmil		4/0–250 kcmil			87H	15506SS [2]	6.56 (166.6)	5.00 (127.0)
53080*		500 kcmil		500 kcmil			125H	15603 [3]	5.19 (131.8)	5.19 (131.8)

* 4/0–250 wire barrels suitable for 1/2 in. and 5/8 rod, 300–500 kcmil wire barrels suitable for 3/4 in. rods, 500 kcmil wire barrels suitable for 1 rods.

** Do not meet IEEE837.

Cat. No. 15500TB adaptor is required for all 15500SS Series dies, not for 15600SS Series, crimp with 15-Ton tools.

Hydraulic tools only.

[*] Number of crimps.