

Brad® Mini-Change® A-Size Plugs for Liquid-Tight Conduit

130006/130018
Female, Male



Features and Benefits

- Patented Quad Beam™ contact design for reliability and low resistance
- Fits standard 1/2" liquid-tight conduit

Reference Information

UL File No.: E152210
CSA File No.: LR6837

Electrical

Voltage: 600V AC/DC

Mechanical


Wire Size: 16 AWG
Wire Type: UL 1015

Physical

Connector Face: PVC
Contact: Brass with Gold over Nickel plating
Connector Body: Zinc-plated Steel
Coupling Nut: Anodized Aluminum
Operating Temperature: -20 to +80° C

Environmental

Protection: IP67

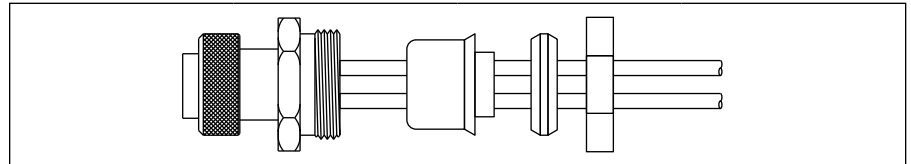

Poles (Female View)	Current	Female		Male	
		Engineering No.	Standard Order No.	Engineering No.	Standard Order No.
3-Pole 1 - Green-gnd 3 - White 2 - Black	13.0A	40925	130006-2099	41037	130006-2102
4-Pole 1 - Black 3 - Red 2 - White 4 - Green-gnd	10.0A	41132	130006-2103	51149	130018-0184
5-Pole 1 - White 4 - Orange 2 - Red 5 - Black 3 - Green-gnd	8.0A	41344	130006-2107	41593	130006-2109

Note: Sales drawings for all standard order numbers are available on molex.com