

## Straight Blade Devices INDUSTRIAL

6

Straight Blade Devices

# 15A, 20A | Traditional Receptacles | Hospital Grade


### **Extra Heavy-Duty Hospital Grade Receptacles**

Leviton Extra Heavy-Duty Hospital Grade Receptacles meet or exceed the performance requirements for the coveted UL Hospital Grade listing. They are offered in standard, tamper-resistant, power indication, illuminated and isolated ground versions of Leviton's conventional and Decora Plus™ duplex configurations. Leviton also offers a version specifically designed for use in MRI and other applications exposed to high magnetic fields.

#### **Features and Benefits**

- Exclusive V-shaped, serrated back-wiring clamps for superior contact and conductivity
- Back and side wiring options accept #14-#10 AWG stranded or solid wire
- UL 498 listed (HG), CSA and NOM certified
- Meets NEMA WD-1 and 6 and ANSI standards Fed Spec
- Backed by a limited 10-year warranty

#### 8300-SGW

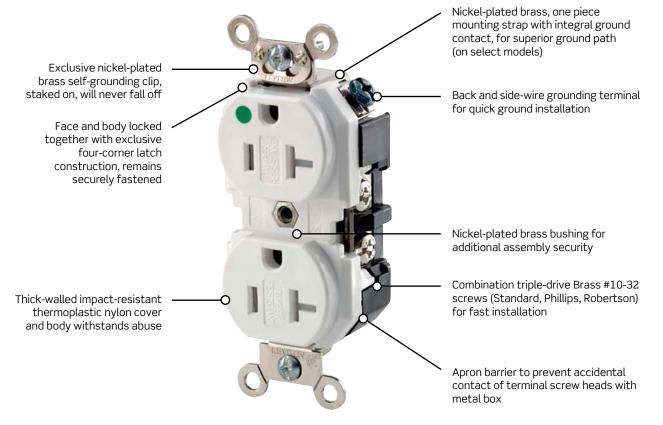

#### Color Choices Hospital straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.





#### **Related Products**

Leviton also offers Decora Plus<sup>™</sup> and Lev-Lok<sup>®</sup> Decora Plus<sup>™</sup> Hospital Grade devices. For more information see the Hospital Grade Devices section, page I-6 for Decora Plus<sup>™</sup> and page I-16 for Lev-Lok<sup>®</sup> Decora Plus<sup>™</sup>.



# Floor Box Assembly

#### **Features and Benefits**

- Complies with NEC 314.27(B)
- All-in-one, ready-to-wire unit provides quick, easy installation
- Plate gasket and O-ring combine to seal out moisture and contaminants
- Thick brass plate and screw cap resist abuse and prevent contaminants from entering device
- Durable thermoplastic receptacle face and body resist breakage
- Brass screw cap threaded to fit flush to plate
- Backed by a limited 10-year warranty

Floor Box Assemblies   🕲				
Rating		15A-125V	20A-125V	
NEMA				
		5-15R	5-20R	
Description	Color	Cat. No.	Cat. No.	
Duplex, Tamper-Resistant	Brushed Brass	25249-TFB	_	
	Nickel Finish	25249-TFN	—	
Duplex	Brushed Brass	25249-FBA	25349-FBA	
	Nickel Finish	25249-SBA	—	
Single	Brushed Brass	5249-FBA	5349-FBA	
Single Display Receptacle with Solid Brass Plate	Brushed Brass	5250	_	
Floorbox Replacement Screw	Brushed Brass	5249-CAP	_	
Cap with O-Ring — Single	2. 00.100 21000			
Floorbox Replacement Screw Cap with O-Ring — Duplex	Brushed Brass	25249-CAP	_	

QuickPort<sup>®</sup> Snap-In Jacks and Modules with Brass Floorplate <sup>®</sup>

Description	Color	Cat. No.
Floor Jack Housing with Brass Plate and 6-Conductor Jack, 1 blank	Brass	41650-6
Floor Jack Housing with Brass Plate and Coaxial F-Connector, 1 blank	Brass	41650-F
Floor Jack Housing with Brass Plate and two 6-Conductor Jacks	Brass	41652-6
Floor Jack Housing with Brass Plate and Coaxial F-Connector, 6-Conductor Jack	Brass	41652-6F
Floor Jack Housing only, 1 blank filler provided		41652

e 6

5249-FBA

41650-F