

## GFCI RECEPTACLES

### Tamper-Resistant and Non Tamper-Resistant Self-Test GFCI Receptacles


The SmartlockPro® Self-Test GFCIs contain the latest innovation in ground fault protection by automatically conducting a periodic internal test to confirm that the GFCI is able to respond to a ground fault. Easy to install, they take up to 25% less space in the wallbox vs. typical GFCIs and can fit into any box, even shallow ones. These slim GFCIs provide all the lockout benefits of our standard SmartlockPro® offering, and are available in tamper-resistant and non tamper-resistant versions. Constructed of resilient thermoplastic and able to withstand high torque levels, self-test GFCIs come in styles for every need, including a combination guide light/receptacle and a blankface device.

GFTR1-W


Takes up to 25% less space in the wallbox vs. other GFCIs




Older Model GFCI



SmartlockPro® GFCI

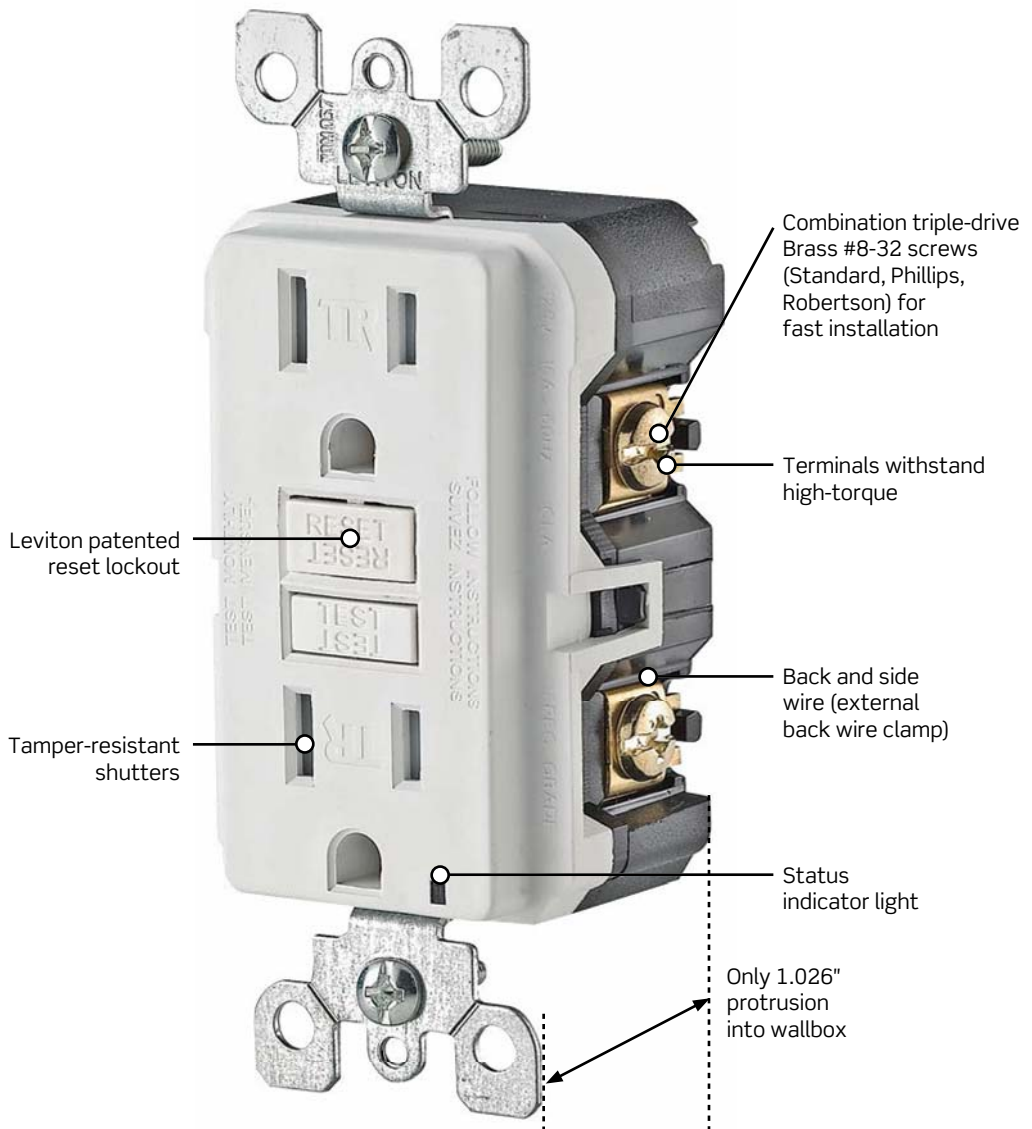

**Color Choices** GFCI receptacles are offered in a wide range of colors. To order colors, add suffix to Cat. No.

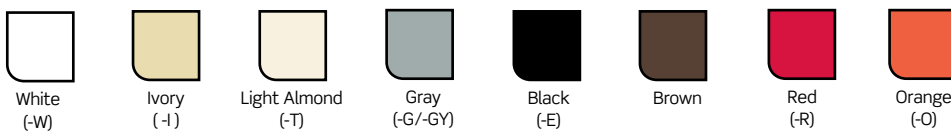

## GFCI RECEPTACLES | Leaded | Combo Pilot Light

# SmartlockPro® Self-Test Industrial Grade GFCI with Professional Grade Lockout

### Features and Benefits

- Patented bridge contact provides individual sets of contacts for GFCI receptacle face and downstream receptacles; no power to receptacle face if improperly wired (line-load reversal)
- Patented lockout feature for added safety prevents RESET if GFCI is not operating properly
- Provides continuous ground fault protection — detects and trips on actual ground fault even when self-test is being conducted
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal
- Auto-monitoring exceeds the UL requirement. Auto adapts and shifts to more frequent testing if potential problem is detected. Testing frequency regularly updates protection status. Electronics are designed to minimize any false triggers
- Compatible with all Decora® devices and wallplates; available in select Decora® colors
- Tamper-resistant shutters meet NEC Article 406.12 requirements (where stated)
- Impact and chemical resistant PBT face for longer service life
- Improved strap design provides greater support, even with ears removed
- Fed Spec
- Backed by a limited 2-year warranty

### Isolated Ground GFCI

- Isolated ground terminal pre-wired for quick assembly

### Pilot Light GFCI

- Long-lasting, energy efficient LEDs with 20-year life expectancy — no bulbs to replace
- High-visibility power indicator illuminates when power to the receptacle is present
- Ideal for equipment protection on dedicated branch circuits

### Leaded

- Include #12 AWG TEW line and load leads plus a ground wire for broadest installation flexibility
- Terminals are enclosed for added safety

### SmartlockPro® Self-Test GFCI Receptacle with Professional Grade Lockout Fed Spec

Rating		15A-125V @ Receptacle 20A-125V Feed-Through	20A-125V @ Receptacle 20A-125V Feed-Through
Description	Color	Cat. No.	Cat. No.
SmartlockPro® Isolated Ground Tamper-Resistant GFCI Receptacle	Orange*	GFTR1-IGO	GFTR2-IGO
SmartlockPro® Tamper-Resistant GFCI Receptacle with Pilot Light	White	GFPL1-PLW	GFPL2-PLW
	Ivory	GFPL1-PLI	GFPL2-PLI
	Light Almond	GFPL1-PLT	GFPL2-PLT
	Gray	GFPL1-PLG	GFPL2-PLG
	Black	GFPL1-PLE	GFPL2-PLE
	Brown	GFPL1-PL	GFPL2-PL
	Red	GFPL1-PLR	GFPL2-PLR



GFTR1-IGO



GFPL2-PLW



GFTR2-5LW

### SmartlockPro® Wire Lead Self-Test GFCI Receptacle with Professional Grade Lockout Fed Spec

Rating		15A-125V @ Receptacle 20A-125V Feed-Through	20A-125V @ Receptacle 20A-125V Feed-Through
Description	Color	Cat. No.	Cat. No.
SmartlockPro® Wire Lead Tamper-Resistant Duplex GFCI	White*	GFTR1-5LW	GFTR2-5LW
	Ivory*	GFTR1-5LI	GFTR2-5LI

\*Other colors available upon special request