



## European Fuses DIN Fuses for Motor 3.6kV to 12kV - Type aSJB/D



### Characteristics of trip-indicators

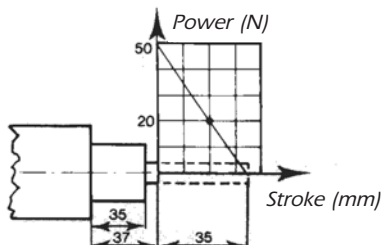

According to standard IEC 2.82.1, DIN 43625 and IEC application requirements Publication 644



Rated Voltage (kV)	L (mm)	Rating I <sub>n</sub> (A)	Designation	Reference Number	Diameter (mm)	Weight (Kg)	Catalog Number
3,6	192	32	369 P CP aSJB 45/50,8x192 32	S076468	50,8	1,0	45ASB36V32P-1
		50	369 P CP aSJB 45/50,8x192 50	T076469	50,8	1,0	45ASB36V50P-1
		63	369 P CP aSJB 45/50,8x192 63	V076470	50,8	1,0	45ASB36V63P-1
		80	369 P CP aSJB 45/50,8x192 80	W076471	50,8	1,0	45ASB36V80P-1
		100	369 P CP aSJB 45/50,8x192 100	X076472	50,8	1,0	45ASB36V100P-1
		125	369 P CP aSJB 45/50,8x192 125	Y076473	50,8	1,0	45ASB36V125P-1
		160	369 P CP aSJB 45/67x192 160	Z076474	67	1,7	45ASB36V160P-1
		200	369 P CP aSJB 45/67x192 200	A076475	67	1,7	45ASB36V200P-1
	292	250	369 P CP aSJB 45/76x192 250	B076476	76	2,2	45ASB36V250P-1
		315	369 P CP aSJB 45/90x192 315	C076477	88	3,0	45ASB36V315P-1
		100	369 P CP aSJB 45/50,8x292 100	N075521	50,8	1,6	45ASB36V100P-2
		125	369 P CP aSJB 45/50,8x292 125	P075522	50,8	1,6	45ASB36V125P-2
		160	369 P CP aSJB 45/50,8x292 160	Q075523	50,8	1,6	45ASB36V160P-2
		200	369 P CP aSJB 45/67x292 200	R075524	67	2,5	45ASB36V200P-2
		250	369 P CP aSJB 45/67x292 250	S075525	67	2,5	45ASB36V250P-2
		315	369 P CP aSJB 45/76x292 315	E075582	76	3,2	45ASB36V315P-2
7,2	292	350	369 P CP aSJB 45/76x292 350	F075583	76	3,2	45ASB36V350P-2
		430	369 P CP aSJB 45/90x292 430	G075584	88	4,3	45ASB36V430P-2
		32	729 P CP aSJB 45/50,8x292 32	J078162	50,8	1,6	45ASB72V32P-2
		50	729 P CP aSJB 45/50,8x292 50	K078163	50,8	1,6	45ASB72V50P-2
		63	729 P CP aSJB 45/50,8x292 63	L078164	50,8	1,6	45ASB72V63P-2
		80	729 P CP aSJB 45/50,8x292 80	M078165	50,8	1,6	45ASB72V80P-2
		100	729 P CP aSJB 45/50,8x292 100	N078166	50,8	1,6	45ASB72V100P-2
		125	729 P CP aSJB 45/67x292 125	P078167	67	2,5	45ASB72V125P-2
	442	160	729 P CP aSJB 45/67x292 160	Q078168	67	2,5	45ASB72V160P-2
		200	729 P CP aSJB 45/90x292 200	H093709	88	4,3	45ASB72V200P-2
		250	729 P CP aSJB 45/90x292 250	R078169	88	4,3	45ASB72V250P-2
		100	729 P CP aSJB 45/50,8x442 100	Y085581	50,8	2,8	45ASD72V100P-3
		125	729 P CP aSJB 45/50,8x442 125	Z085582	50,8	2,8	45ASD72V125P-3
		160	729 P CP aSJB 45/50,8x442 160	A085583	50,8	2,8	45ASD72V160P-3
		200	729 P CP aSJB 45/76x442 200	Q085620	76	4,8	45ASD72V200P-3
		250	729 P CP aSJB 45/76x442 250	R085621	76	4,8	45ASD72V250P-3
12	442	315	729 P CP aSJB 45/90x442 315	S085622	88	6,8	45ASD72V315P-3
		400	729 P CP aSJB 45/90x442 400	V085624	88	6,8	45ASD72V400P-3
		32	1209 P CP aSJB 45/50,8x442 32	D076478	50,8	2,8	45ASB120V32P-3
		50	1209 P CP aSJB 45/50,8x442 50	E076479	50,8	2,8	45ASB120V50P-3
		63	1209 P CP aSJB 45/50,8x442 63	F076480	50,8	2,8	45ASB120V63P-3
		80	1209 P CP aSJB 45/50,8x442 80	G076481	50,8	2,8	45ASB120V80P-3
		100	1209 P CP aSJB 45/50,8x442 100	H076482	50,8	2,8	45ASB120V100P-3
		125	1209 P CP aSJB 45/67x442 125	J076483	67	3,7	45ASB120V125P-3
		160	1209 P CP aSJB 45/67x442 160	K076484	67	3,7	45ASB120V160P-3
		200	1209 P CP aSJB 45/76x442 200	L076485	76	5,5	45ASB120V200P-3
250	1209 P CP aSJB 45/90x442 250	M076486	88	6,2	45ASB120V250P-3		

Note: These fuses are systematically equipped with a trip-indicator