

Power Mod

WMMB Aux Pull Box & MS_UBD Switches

• Revised •
06/01/13

METER CENTERS
2

Main Features:

- EUSERC compliant incoming pull section
- Dual cover handles
- Single and three phase models



EUSERC compliant pullbox modules: 1-phase, 3-wire SN, incoming, 120/240V AC max. ^③

Catalog number	Ampere rating	Withstand rating ^②	Service feed	Dimensions (inches) ^①			KO drawing no.	Line terminal lugs no. and size per line and neutral	Knockout Diagrams
				Height	Width	Depth			
WMMB1400	400	65,000	UG	37.50	16.69	9.34	P-1	1 set of 2 studs	P-1
WMMB1800	800	65,000	UG	45.50	19.44	12.72	P-2	1 set of 2 studs	P-2
WMMB11200	1200	65,000	UG	47.50	25.94	12.72	P-3	3 sets of 2 studs	P-3

EUSERC compliant pullbox modules: 3-phase, 4-wire SN, incoming, 240V AC max. ^③

Catalog number	Ampere rating	Withstand rating ^②	Service feed	Dimensions (inches) ^①			KO drawing no.	Line terminal lugs no. and size per line and neutral	Knockout Diagrams
				Height	Width	Depth			
WMMB3400	400	65,000	UG	37.50	16.69	9.34	P-1	1 set of 2 studs	P-1
WMMB3800	800	65,000	UG	45.50	25.94	12.72	P-2	2 set of 2 studs	P-2
WMMB31200	1200	65,000	UG	47.50	33.83	12.72	P-3	3 sets of 2 studs	P-3

MS_UBD Bus Duct connected switch mains ^④

Catalog number	Ampere rating	Dimensions (Inches) ^①			Mechanism type	AIC rating	Knockout Diagrams
		Height	Width	Depth			
MS44UBD	400	33.00	15.00	14.94	Class T fuse	100,000	BD-1
MS64UBD	600	33.00	15.00	14.94			BD-2
MS84UBD	800	33.00	15.00	14.94			BD-3

^① Dimensions shown are representative of outside box dimensions and do not include allowances for mounting bumps, endwalls, covers, hubs, or hardware protrusions. Dimensions are subject to change.

^② Devices rated for 22,000. 65,000 rating requires cables to be tied together. Please see instructions with pullbox for details.


^③ Devices do not have thru bus.
^④ All devices are built to order. Tap stack and QuickConnect sold separately.

Multi-family Metering — WMMB

Power Mod

WMMB Aux Pull Box & MS_UBD Switches: Knockout Diagrams



2
METER
CENTERS

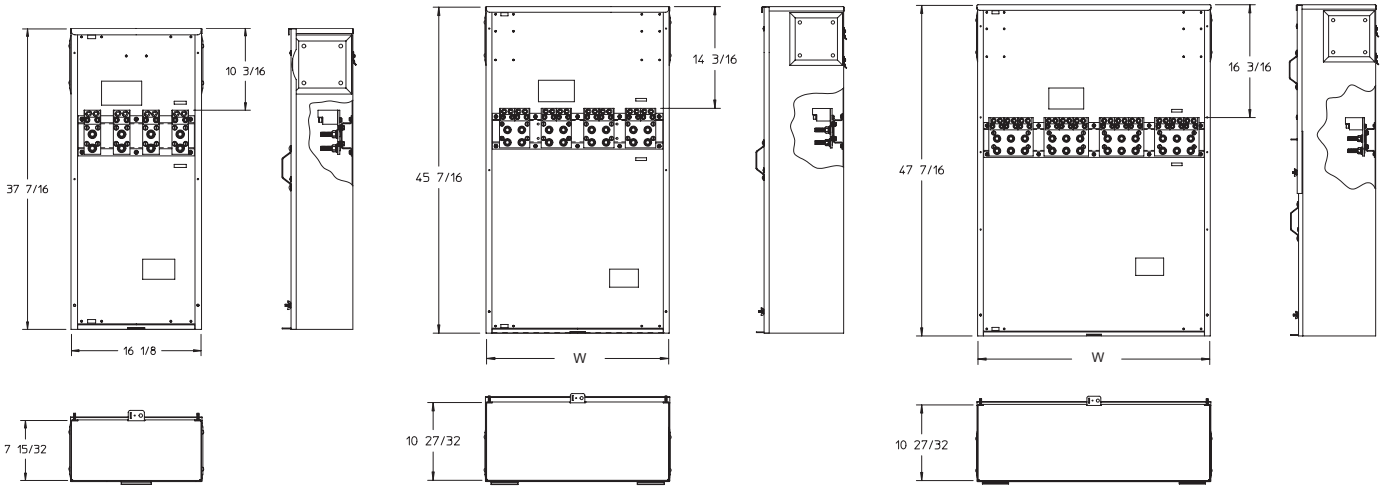


P-1
WMMB1400
WMMB3400

P-2	
	Width
WMMB1800	19.44
WMMB3800	25.94


P-3	
	Width
WMMB11200	25.94
WMMB31200	33.83

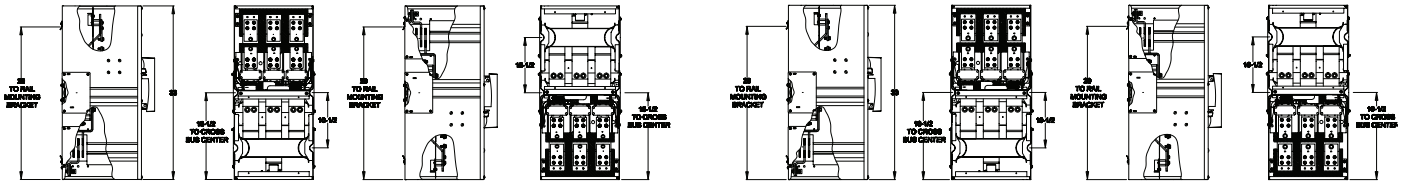

BD-1
MS44UBD



BD-2
MS64UBD



BD-3
MS84UBD

Multi-family
Metering—WMMB